

诚信 · 沟通 · 合作

Honestly Communication Cooperation

真诚携手，共创未来



*Ocsonic*

**Electric power fittings**



*Ocsonic*

**CHANGZHOU OCEAN ELECTRONIC CORP. LTD.**

Add: C653 Jiayeguomao No.99 West Yanling road, Changzhou, Jiangsu, China

Tel: 0086-519-86699807 86698278 86692958 86698268

E-mail [ocsonic@cz-ocean.com](mailto:ocsonic@cz-ocean.com)

Http: [//www.ocsonic.com](http://www.ocsonic.com)

**CHANGZHOU OCEAN ELECTRONIC CORP.LTD.**

[WWW.OCSONIC.COM](http://WWW.OCSONIC.COM)

## 目录 | CONTENTS


|                                                                                                             |       |
|-------------------------------------------------------------------------------------------------------------|-------|
| DT ( G ) /JG 系列铜接线端子<br>Copper Connecting Terminals                                                         | 1-2   |
| SC ( JGY ) /SC ( JGB ) 引进窥口三角型, 喇叭口型接线端子<br>Imported Spy Triangle<br>Bell Mouth Copper Connecting Terminals | 3-4   |
| SC ( JGK ) /SC ( JGA ) 端子<br>Imported Copper Terminals                                                      | 5-6   |
| SC ( JGK ) 端子 ( 加长 )<br>Imported Copper Terminals ( lengthen )                                              | 7     |
| GTY 引进铜接线管<br>Imported Copper Connecting Tube                                                               | 8-9   |
| OT 铜开口接线鼻<br>Copper open connecting nose/gt-1<br>GTL 连接管 ( 堵油型 )<br>Connecting tube ( oil seal )            | 10-11 |
| GT-1/GL-1 连接管 ( 通孔型 )<br>Connecting Tube ( passing Through )                                                | 12-13 |
| DT/DL 系列铜、铝接线端子<br>Copper,aluminium Connecting Terminals                                                    | 14-15 |
| DTL系列铜铝接线端子<br>Copper Aluminium Connecting Terminals                                                        | 16-17 |
| DIN 标准引进铝接线管<br>Din Aluminium Connecting Tube<br>DIN DL 铝鼻<br>Din Aluminium Connecting Terminals            | 18-19 |
| AUS 引进铜接线端子、AUS-TUBE接线管<br>Imported Copper Terminals Connecting Tube                                        | 20-21 |
| AL-CU 铜铝接线端子<br>AL-CU Bimetal Cable Lug (insert)                                                            | 22    |
| CCT/CCA 型铜接线夹<br>Copper Connection Clamp                                                                    | 23-24 |
| C45插针<br>C45 PLUG-IN NEEDLE                                                                                 | 25    |
| 铜铝接线夹系列<br>Copper and copper-aluminium contact clip                                                         | 26-33 |

|                                                                                                                                              |       |
|----------------------------------------------------------------------------------------------------------------------------------------------|-------|
| 铜铝并沟线夹CAPG型和铝并沟线夹APG<br>CAPG copper-aluminium pg clamp& APG<br>aluminium parallel-groove clamp                                               | 34-35 |
| QLS 尼龙电缆固定头<br>Qls Nylon Cable Gland                                                                                                         | 36    |
| 铜制电缆防水固定头<br>metal cable gland                                                                                                               | 37    |
| WCJC 引进铜接线夹/QPZ 引进球避雷针<br>Imporetd Copper Jointing Clamp<br>Imporetd Ball Type Lighting Rod                                                  | 38-39 |
| 其它类金具<br>Other Fitting                                                                                                                       | 39-40 |
| KNF 型穿刺线地线夹<br>KNF Type piercing ground connectors<br>KNF10 型穿刺线地线夹 ( 10KV )<br>KNF10 Type piercing ground connectors(10KV)                  | 41-42 |
| KN10 型系列高压绝缘穿刺线夹<br>KN10 High-voltage Insulation Piercing Connectors(ipc)<br>10kv 系列产品 ( 高压系列 ) 10kv Series Products ( high Voltage Series ) | 43    |
| 圆形预绝缘端头 ( To-JTK型 )<br>Insulated Ring Terminals                                                                                              | 44-45 |
| 预绝缘端子<br>Pre-insulating Terminal                                                                                                             | 46-47 |
| OT/UT 冷压接线端子及接头<br>OT/UT Terminals Of Cola Ompressed Made                                                                                    | 48    |
| OT/UT 冷压接线端子及接头<br>OT/UT Terminals Of Cola Ompressed Made                                                                                    | 49    |
| QLS 自锁式尼龙扎带<br>QLS Self-locking Nylon Cable Ties                                                                                             | 50    |
| QLS 绝缘配线槽<br>QLS Wiring Duct ( Slotted )                                                                                                     | 51    |
| QLS 膨胀管<br>QLS Exp And Nails                                                                                                                 | 52    |

## DT ( G )

### 系列铜接线端子

COPPER CONNECTING TERMINALS

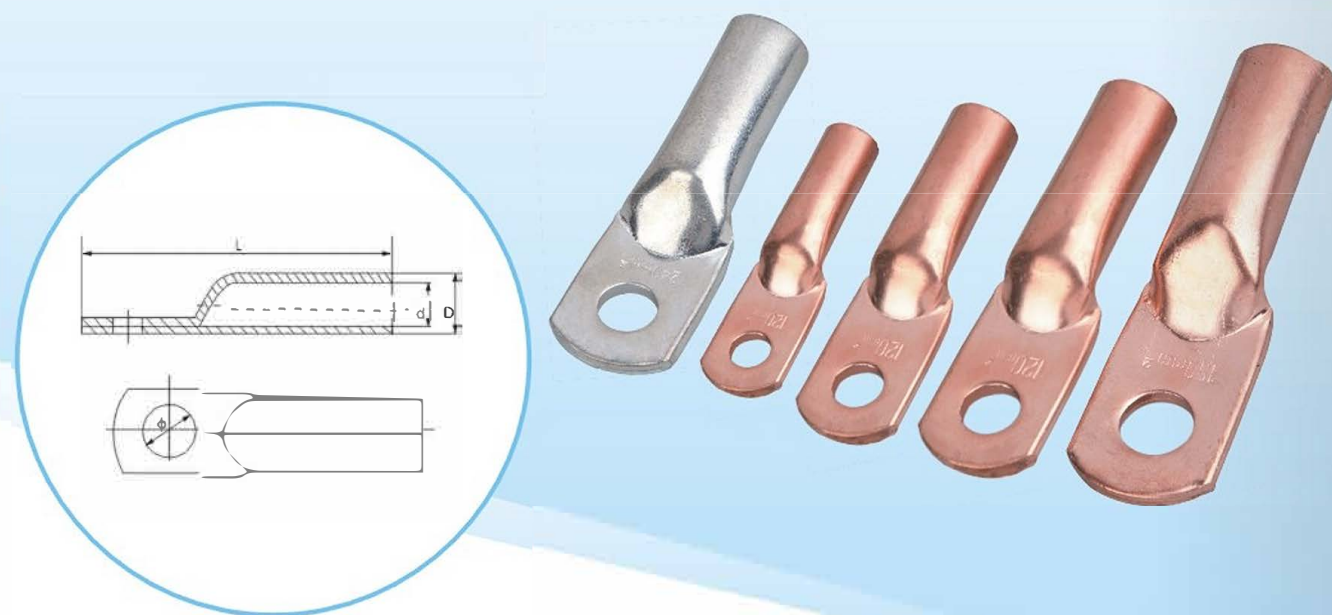

#### ◎ 用途 | Application

JG 适用于配电装置中电线、电力电缆与电器设备的连接。采用 ( T2 ) 铜管料压制，表面镀锡。


These products are applicable to the connection of wires in distribution equipment power supply cable with electronic apparatus, it is made of (T2) copper tube by die cast and coated tin.

| 型号 Type   | $\phi$ | D  | d  | L   |
|-----------|--------|----|----|-----|
| DT(G)-10  | 6.2    | 8  | 5  | 52  |
| DT(G)-16  | 6.2    | 9  | 6  | 57  |
| DT(G)-25  | 6.2    | 10 | 7  | 62  |
| DT(G)-35  | 8.5    | 11 | 8  | 66  |
| DT(G)-50  | 8.5    | 13 | 10 | 72  |
| DT(G)-70  | 10.5   | 16 | 12 | 80  |
| DT(G)-95  | 10.5   | 18 | 14 | 85  |
| DT(G)-120 | 12.5   | 20 | 15 | 96  |
| DT(G)-150 | 12.5   | 23 | 17 | 102 |
| DT(G)-185 | 14.5   | 25 | 19 | 114 |
| DT(G)-240 | 16.5   | 27 | 21 | 120 |
| DT(G)-300 | 16.5   | 31 | 24 | 135 |
| DT(G)-400 | 18.5   | 34 | 26 | 150 |
| DT(G)-500 | 20.5   | 38 | 30 | 170 |
| DT(G)-630 | 22.5   | 45 | 35 | 210 |
| DT(G)-800 | 22.5   | 50 | 40 | 270 |

## JG

### 系列铜接线端子

COPPER CONNECTING TERMINALS

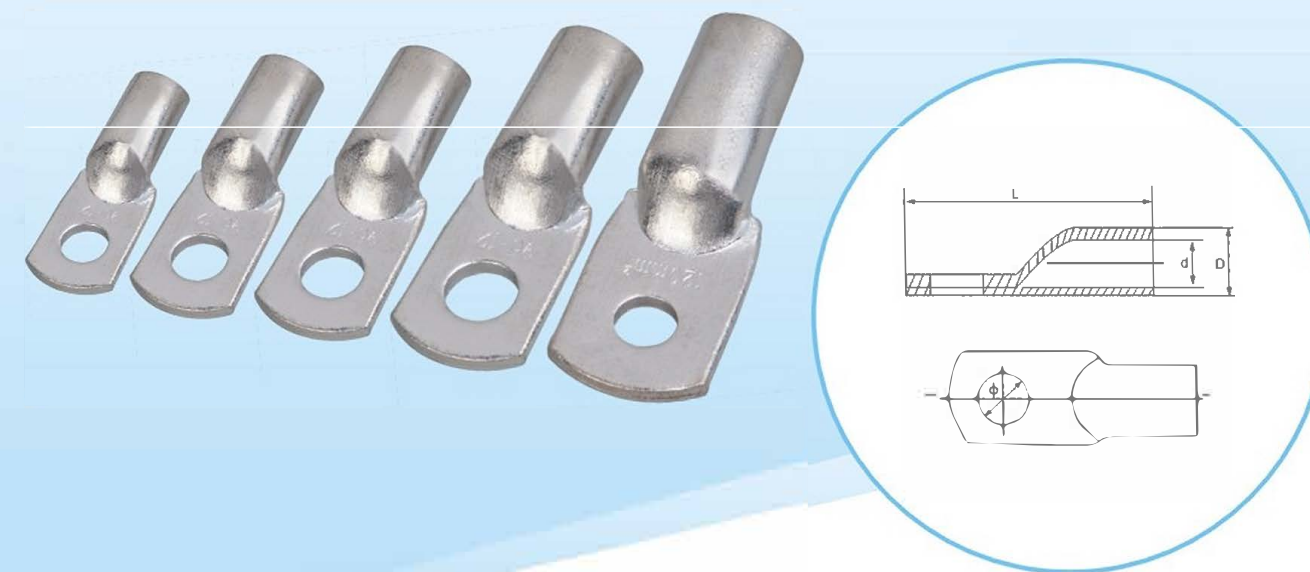

#### ◎ 用途 | Application

DT ( G ) 适用于配电装置中电线、电力电缆与电器设备的连接。采用 ( T2 ) 铜管料压制，表面镀锡。


These products are applicable to the connection of wires in distribution equipment power supply cable with electronic apparatus, it is made of (T2) copper tube by die cast and coated tin.

| 型号 Type | $\phi$ | D  | d  | L   |
|---------|--------|----|----|-----|
| JG-10   | 6.2    | 8  | 5  | 38  |
| JG-16   | 8.4    | 9  | 6  | 41  |
| JG-25   | 8.4    | 10 | 7  | 46  |
| JG-35   | 8.5    | 11 | 8  | 52  |
| JG-50   | 8.5    | 13 | 10 | 54  |
| JG-70   | 10.5   | 16 | 12 | 61  |
| JG-95   | 10.5   | 18 | 14 | 66  |
| JG-120  | 12.5   | 20 | 15 | 73  |
| JG-150  | 12.5   | 23 | 17 | 77  |
| JG-185  | 14.5   | 25 | 19 | 86  |
| JG-240  | 16.5   | 27 | 21 | 93  |
| JG-300  | 16.5   | 31 | 24 | 103 |
| JG-400  | 18.5   | 34 | 26 | 113 |
| JG-500  | 20.5   | 38 | 30 | 124 |
| JG-630  | 22.5   | 45 | 35 | 140 |
| JG-800  | 22.5   | 50 | 40 | 170 |

## SC ( JGY )

### 引进窥口三角型接线端子

INTRODUCTION OF PEEPHOLE TRIANGULAR TERMINAL BLOCKS

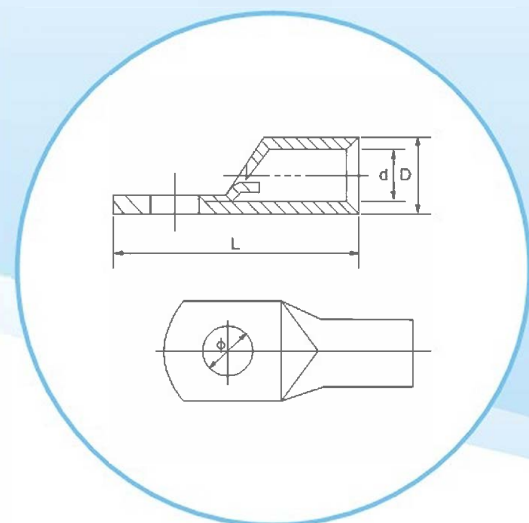

#### ◎ 用途 | Application

适用于标称截面 1.5~1000mm<sup>2</sup> 电力电缆式电线的铜导体与电气设备的连接，特点，采用管料含铜量 > 99.9% 的高纯 T2 铜管制造，长期工作温度 -55℃~150℃，表面镀锡。


These products are suitable for the connection of copper conductors (section 1.5~1000mm<sup>2</sup>) in power cable with electronic equipment they are made of with higher 99.9 percent pure copper tube T2 and coated with tin. working temperature -55℃~150℃.

| 型号 Type      | φ                            | D    | d    | L    |
|--------------|------------------------------|------|------|------|
| SC(JGY)-1.5  | φ 4.2, φ 5.2                 | 3.5  | 1.8  | 18   |
| SC(JGY)-2.5  | φ 4.2, φ 5.2, φ 6.2          | 4    | 2.5  | 19   |
| SC(JGY)-4    | φ 5.2, φ 6.2                 | 4.8  | 3.1  | 21   |
| SC(JGY)-6    | φ 5.2, φ 6.2, φ 8.2          | 5.5  | 3.8  | 24   |
| SC(JGY)-10   | φ 6.2, φ 8.2                 | 6.8  | 4.8  | 25.5 |
| SC(JGY)-16   | φ 6.2, φ 8.2, φ 10.5         | 7.5  | 5.5  | 30.5 |
| SC(JGY)-25   | φ 6.2, φ 8.2, φ 10.5         | 9    | 7    | 34   |
| SC(JGY)-35   | φ 6.2, φ 8.2, φ 10.5, φ 12.5 | 10.5 | 8.2  | 38   |
| SC(JGY)-50   | φ 8.2, φ 10.5, φ 12.5        | 12.5 | 9.8  | 45   |
| SC(JGY)-70   | φ 8.2, φ 10.5, φ 12.5        | 14.5 | 11.5 | 50   |
| SC(JGY)-95   | φ 10.5, φ 12.5               | 17.5 | 13.8 | 55.5 |
| SC(JGY)-120  | φ 12.5, φ 16.5               | 19.5 | 15.5 | 63   |
| SC(JGY)-150  | φ 12.5, φ 16.5               | 21   | 16.5 | 71   |
| SC(JGY)-185  | φ 16.5                       | 23.5 | 18.8 | 78   |
| SC(JGY)-240  | φ 16.5                       | 26.5 | 21   | 92   |
| SC(JGY)-300  | φ 16.5, φ 20.5               | 30   | 24   | 102  |
| SC(JGY)-400  | φ 16.5, φ 20.5               | 34   | 26.5 | 113  |
| SC(JGY)-500  | φ 16.5, φ 20.5               | 38   | 30   | 123  |
| SC(JGY)-630  | φ 20.5                       | 45   | 35   | 135  |
| SC(JGY)-800  | φ 22.5                       | 50   | 39   | 170  |
| SC(JGY)-1000 | φ 22.5                       | 56   | 44   | 200  |

## SC ( JGB )

### 喇叭口型接线端子

HORN SHAPED TERMINAL BLOCKS

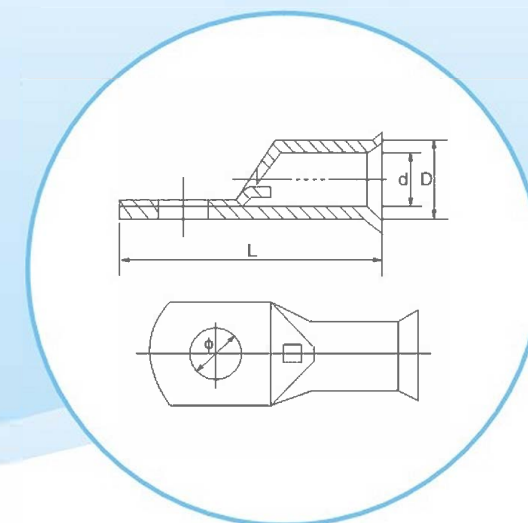

#### ◎ 用途 | Application

适用于标称截面 1.5~1000mm<sup>2</sup> 电力电缆式电线的铜导体与电气设备的连接，特点，采用管料含铜量 > 99.9% 的高纯 T2 铜管制造，长期工作温度 -55℃~150℃，表面镀锡。


These products are suitable for the connection of copper conductors (section 1.5~1000mm<sup>2</sup>) in power cable with electronic equipment they are made of with higher 99.9 percent pure copper tube T2 and coated with tin. working temperature -55℃~150℃.

| 型号 Type      | φ                            | D    | d    | L    |
|--------------|------------------------------|------|------|------|
| SC(JGB)-1.5  | φ 4.2, φ 5.2                 | 3.5  | 1.8  | 18   |
| SC(JGB)-2.5  | φ 4.2, φ 5.2, φ 6.2          | 4    | 2.5  | 19   |
| SC(JGB)-4    | φ 5.2, φ 6.2                 | 4.8  | 3.1  | 21   |
| SC(JGB)-6    | φ 5.2, φ 6.2, φ 8.2          | 5.5  | 3.8  | 24   |
| SC(JGB)-10   | φ 6.2, φ 8.2                 | 6.8  | 4.8  | 25.5 |
| SC(JGB)-16   | φ 6.2, φ 8.2, φ 10.5         | 7.5  | 5.5  | 30.5 |
| SC(JGB)-25   | φ 6.2, φ 8.2, φ 10.5         | 9    | 7    | 34   |
| SC(JGB)-35   | φ 6.2, φ 8.2, φ 10.5, φ 12.5 | 10.5 | 8.2  | 38   |
| SC(JGB)-50   | φ 8.2, φ 10.5, φ 12.5        | 12.5 | 9.8  | 45   |
| SC(JGB)-70   | φ 8.2, φ 10.5, φ 12.5        | 14.5 | 11.5 | 50   |
| SC(JGB)-95   | φ 10.5, φ 12.5               | 17.5 | 13.8 | 55.5 |
| SC(JGB)-120  | φ 12.5, φ 16.5               | 19.5 | 15.5 | 63   |
| SC(JGB)-150  | φ 12.5, φ 16.5               | 21   | 16.5 | 71   |
| SC(JGB)-185  | φ 16.5                       | 23.5 | 18.8 | 78   |
| SC(JGB)-240  | φ 16.5                       | 26.5 | 21   | 92   |
| SC(JGB)-300  | φ 16.5, φ 20.5               | 30   | 24   | 102  |
| SC(JGB)-400  | φ 16.5, φ 20.5               | 34   | 26.5 | 113  |
| SC(JGB)-500  | φ 16.5, φ 20.5               | 38   | 30   | 123  |
| SC(JGB)-630  | φ 20.5                       | 45   | 35   | 135  |
| SC(JGB)-800  | φ 22.5                       | 50   | 39   | 170  |
| SC(JGB)-1000 | φ 22.5                       | 56   | 44   | 200  |

## SC ( JGK )

### 系列进口铜端子

IMPORTED COPPER TERMINALS

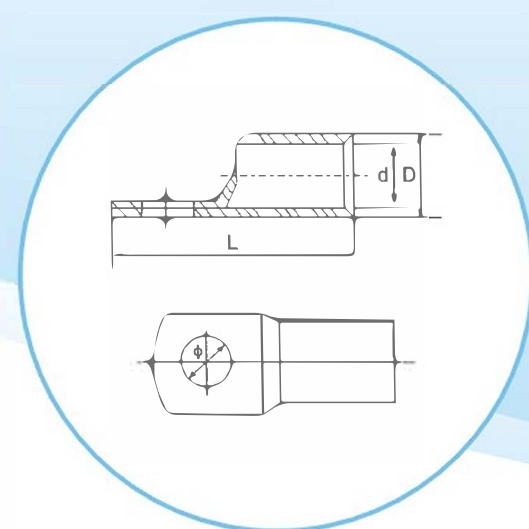

#### ◎ 用途 | Application

适用于标称截面 1.5–1000mm<sup>2</sup>电力电缆式电线的铜导体与电气设备的连接，特点，采用管料含铜量 > 99.9% 的高纯T2铜管制造，长期工作温度–55℃–150℃，表面镀锡。


These products are suitable for the connection of copper conductors (section 1.5–1000mm<sup>2</sup>) in power cable with electronic equipment they are made of with higher 99.9 percent pure copper tube T2 and coated with tin. Working temperature –55℃–150℃.

| 型号 Type      | φ                            | D    | d    | L    |
|--------------|------------------------------|------|------|------|
| SC(JGK)–1.5  | φ 4.2, φ 5.2                 | 3.5  | 1.8  | 18   |
| SC(JGK)–2.5  | φ 4.2, φ 5.2, φ 6.2          | 4    | 2.5  | 19   |
| SC(JGK)–4    | φ 5.2, φ 6.2                 | 4.8  | 3.1  | 21   |
| SC(JGK)–6    | φ 5.2, φ 6.2, φ 8.2          | 5.5  | 3.8  | 24   |
| SC(JGK)–10   | φ 6.2, φ 8.2                 | 6.8  | 4.8  | 25.5 |
| SC(JGK)–16   | φ 6.2, φ 8.2, φ 10.5         | 7.5  | 5.5  | 30.5 |
| SC(JGK)–25   | φ 6.2, φ 8.2, φ 10.5         | 9    | 7    | 34   |
| SC(JGK)–35   | φ 6.2, φ 8.2, φ 10.5, φ 12.5 | 10.5 | 8.2  | 38   |
| SC(JGK)–50   | φ 8.2, φ 10.5, φ 12.5        | 12.5 | 9.8  | 46.5 |
| SC(JGK)–70   | φ 8.2, φ 10.5, φ 12.5        | 14.5 | 11.5 | 49   |
| SC(JGK)–95   | φ 10.5, φ 12.5               | 17.5 | 13.8 | 55   |
| SC(JGK)–120  | φ 12.5, φ 16.5               | 19.5 | 15.5 | 64.5 |
| SC(JGK)–150  | φ 12.5, φ 16.5               | 21   | 16.5 | 67   |
| SC(JGK)–185  | φ 16.5                       | 23.5 | 18.8 | 78   |
| SC(JGK)–240  | φ 16.5                       | 26.5 | 21   | 84   |
| SC(JGK)–300  | φ 16.5, φ 20.5               | 30   | 24   | 94   |
| SC(JGK)–400  | φ 16.5, φ 20.5               | 34   | 26.5 | 109  |
| SC(JGK)–500  | φ 16.5, φ 20.5               | 38   | 30   | 123  |
| SC(JGK)–630  | φ 20.5                       | 45   | 35   | 135  |
| SC(JGK)–800  | φ 22.5                       | 50   | 39   | 170  |
| SC(JGK)–1000 | φ 22.5                       | 56   | 44   | 200  |

## SC ( JGA )

### 系列进口铜端子

IMPORTED COPPER TERMINALS

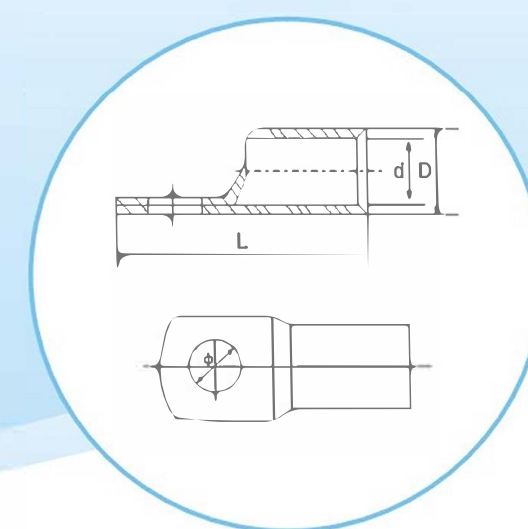

#### ◎ 用途 | Application

适用于标称截面 1.5–1000mm<sup>2</sup>电力电缆式电线的铜导体与电气设备的连接，特点，采用管料含铜量 > 99.9% 的高纯T2铜管制造，长期工作温度–55℃–150℃，表面镀锡。


These products are suitable for the connection of copper conductors (section 1.5–1000mm<sup>2</sup>) in power cable with electronic equipment they are made of with higher 99.9 percent pure copper tube T2 and coated with tin. Working temperature –55℃–150℃.

| 型号 Type      | φ                            | D    | d    | L    |
|--------------|------------------------------|------|------|------|
| SC(JGA)–1.5  | φ 4.2, φ 5.2                 | 3.5  | 1.8  | 18   |
| SC(JGA)–2.5  | φ 4.2, φ 5.2, φ 6.2          | 4    | 2.5  | 19   |
| SC(JGA)–4    | φ 5.2, φ 6.2                 | 4.8  | 3.1  | 21   |
| SC(JGA)–6    | φ 5.2, φ 6.2, φ 8.2          | 5.5  | 3.8  | 24   |
| SC(JGA)–10   | φ 6.2, φ 8.2                 | 6.8  | 4.8  | 25.5 |
| SC(JGA)–16   | φ 6.2, φ 8.2, φ 10.5         | 7.5  | 5.5  | 30.5 |
| SC(JGA)–25   | φ 6.2, φ 8.2, φ 10.5         | 9    | 7    | 34   |
| SC(JGA)–35   | φ 6.2, φ 8.2, φ 10.5, φ 12.5 | 10.5 | 8.2  | 38   |
| SC(JGA)–50   | φ 8.2, φ 10.5, φ 12.5        | 12.5 | 9.8  | 45   |
| SC(JGA)–70   | φ 8.2, φ 10.5, φ 12.5        | 14.5 | 11.5 | 50   |
| SC(JGA)–95   | φ 10.5, φ 12.5               | 17.5 | 13.8 | 55.5 |
| SC(JGA)–120  | φ 12.5, φ 16.5               | 19.5 | 15.5 | 63   |
| SC(JGA)–150  | φ 12.5, φ 16.5               | 21   | 16.5 | 71   |
| SC(JGA)–185  | φ 16.5                       | 23.5 | 18.8 | 78   |
| SC(JGA)–240  | φ 16.5                       | 26.5 | 21   | 92   |
| SC(JGA)–300  | φ 16.5, φ 20.5               | 30   | 24   | 102  |
| SC(JGA)–400  | φ 16.5, φ 20.5               | 34   | 26.5 | 113  |
| SC(JGA)–500  | φ 16.5, φ 20.5               | 38   | 30   | 123  |
| SC(JGA)–630  | φ 20.5                       | 45   | 35   | 135  |
| SC(JGA)–800  | φ 22.5                       | 50   | 39   | 170  |
| SC(JGA)–1000 | φ 22.5                       | 56   | 44   | 200  |

## SC ( JGK )

### 系列进口铜端子 ( 加长 )

IMPORTED COPPER TERMINALS ( LENGTHEN )

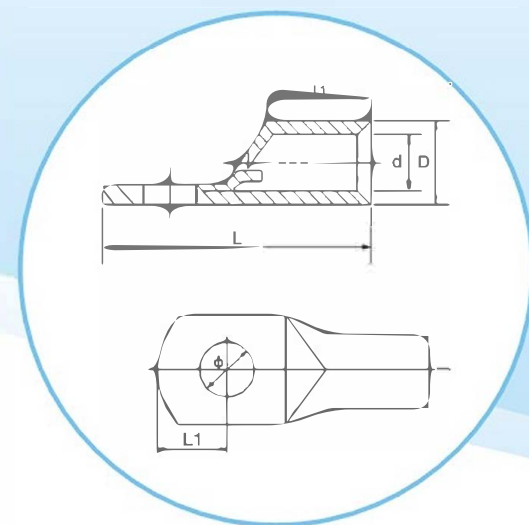

#### ◎ 用途 | Application

适用于标称截面 1.5~1000mm<sup>2</sup> 电力电缆式电线的铜导体与电气设备的连接，特点，采用管料含铜量 > 99.9% 的高纯 T2 铜管制造，长期工作温度 -55℃~150℃，表面镀锡。


These products are suitable for the connection of copper conductors (section 1.5~1000mm<sup>2</sup>) in power cable with electronic equipment. They are made of higher 99.9% pure copper tube T2 and coated with tin. Working temperature -55℃~150℃.

| 型号 Type | D    | d    | L   |
|---------|------|------|-----|
| SC 1.5  | 3.5  | 1.8  | 19  |
| SC 2.5  | 4    | 2.5  | 21  |
| SC 4    | 4.8  | 3.1  | 24  |
| SC 6    | 5.5  | 3.8  | 26  |
| SC 10   | 6.8  | 4.8  | 32  |
| SC 16   | 7.5  | 5.5  | 34  |
| SC 25   | 9    | 7    | 38  |
| SC 35   | 10.5 | 8.2  | 43  |
| SC 50   | 12.5 | 9.8  | 48  |
| SC 70   | 14.5 | 11.5 | 56  |
| SC 95   | 17.5 | 13.8 | 60  |
| SC 120  | 19.5 | 15.5 | 70  |
| SC 150  | 20.5 | 16.5 | 75  |
| SC 185  | 23.5 | 18.5 | 83  |
| SC 240  | 26   | 21   | 95  |
| SC 300  | 30   | 24   | 110 |
| SC 400  | 34   | 27   | 117 |
| SC 500  | 38   | 30   | 129 |

## GTY-1

### 引进铜接线管

IMPORTED COPPER CONNECTING TUBE

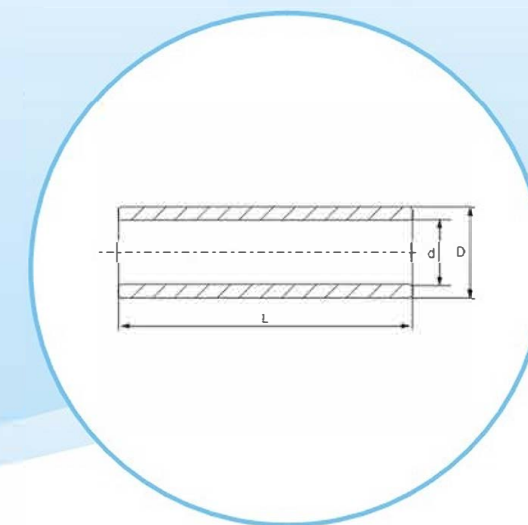

#### ◎ 用途 | Application

适用于配电装置中各种圆型、半圆扇型电线电力电缆之间的连接，采用管料含铜量 ≥ 99.9% 的高纯 T2 铜管制造，表面镀锡。

These products are applicable for the connection of the circular wire, hemicycle wire with power supply cable in distribution equipment. They are made of higher 99.9% pure T2 copper tube, and coated tin.

| 型号 Type | D    | d    | L  |
|---------|------|------|----|
| GTY-1.5 | 3.7  | 1.8  | 20 |
| GTY-2.5 | 4    | 2.5  | 20 |
| GTY-4   | 4.8  | 3.1  | 20 |
| GTY-6   | 5.5  | 3.8  | 25 |
| GTY-10  | 6.8  | 4.8  | 30 |
| GTY-16  | 7.5  | 5.5  | 35 |
| GTY-25  | 9    | 7    | 40 |
| GTY-35  | 10.5 | 8.2  | 45 |
| GTY-50  | 12.5 | 9.8  | 50 |
| GTY-70  | 14.5 | 11.5 | 55 |
| GTY-95  | 17.5 | 13.5 | 60 |

## GTY-2

### 引进铜接线管

IMPORTED COPPER CONNECTING TUBE



#### ◎ 用途 | Application

适用于配电装置中各种圆型、半圆扇型电力电缆之间的连接，采用管料含铜量  $\geq 99.9\%$  的高纯T2铜管制造，表面镀锡。


These products are applicable for the connection of the circular wire, hemicycle wire with power supply cable in distribution equipment. They are made of higher 99.9 percent pure T2 copper tube, and coated tin.

| 型号 Type  | D    | d    | L   |
|----------|------|------|-----|
| GTY-120  | 19.5 | 15   | 65  |
| GTY-150  | 21   | 16.5 | 70  |
| GTY-185  | 23.5 | 18.5 | 75  |
| GTY-240  | 26.5 | 21   | 80  |
| GTY-300  | 30   | 24   | 85  |
| GTY-400  | 34   | 27   | 90  |
| GTY-500  | 38   | 30   | 100 |
| GTY-630  | 45   | 35   | 110 |
| GTY-800  | 50   | 39   | 150 |
| GTY-1000 | 56   | 44   | 170 |

## OT

### 铜开口接线鼻

COPPER OPEN CONECTING NOSE/GT-1

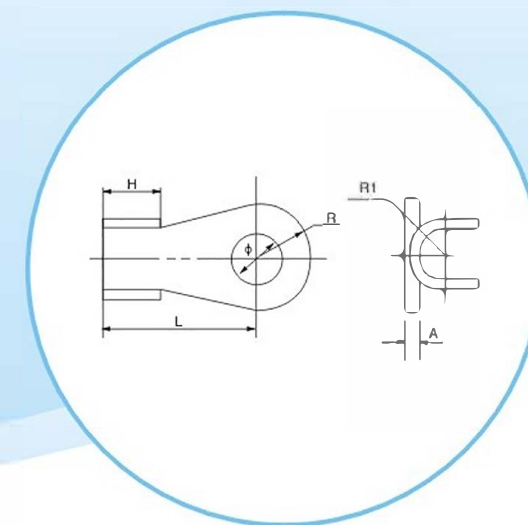

#### ◎ 用途 | Application

适用于配电装置中导线连接。


Suitable for the connection of copper conductors in distribution equipment.

| 型号 Type  | $\phi$ | H    | L    | R    | R1   | A   |
|----------|--------|------|------|------|------|-----|
| OT-10A   | 5.2    | 6    | 14.5 | 4.5  | 2    | 0.8 |
| OT-20A   | 6.2    | 7    | 17   | 5.5  | 2.5  | 1   |
| OT-30A   | 6.2    | 8.2  | 19   | 5.8  | 3.2  | 1.2 |
| OT-40A   | 6.2    | 9    | 19.5 | 6.2  | 3.5  | 1.2 |
| OT-50A   | 6.2    | 9    | 21.5 | 6.5  | 3.5  | 1.2 |
| OT-60A   | 8.2    | 10   | 23   | 7    | 4    | 1.4 |
| OT-80A   | 8.2    | 11   | 25   | 8    | 4.5  | 1.5 |
| OT-100A  | 8.2    | 12   | 29   | 8.5  | 5    | 1.5 |
| OT-150A  | 10.2   | 12   | 31   | 9    | 5.5  | 1.6 |
| OT-200A  | 10.2   | 14   | 33   | 10   | 6    | 1.7 |
| OT-250A  | 10.2   | 15.5 | 36   | 10.5 | 6.5  | 2   |
| OT-300A  | 12.2   | 16   | 40   | 11.5 | 7    | 2   |
| OT-400A  | 12.2   | 18   | 43   | 13   | 8    | 2.2 |
| OT-500A  | 14.2   | 20   | 46   | 14.5 | 8.5  | 2.4 |
| OT-600A  | 16.2   | 22   | 50.5 | 16   | 10.5 | 2.8 |
| OT-800A  | 18.2   | 26   | 61   | 17.5 | 12.5 | 3.2 |
| OT-1000A | 18.2   | 33   | 66   | 20.5 | 15.5 | 3.8 |

## GTL

### 连接管（堵油型）

CONNECTING TUBE ( OIL SEAL )

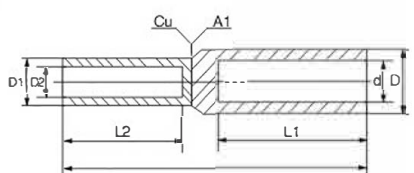

#### ◎ 用途 | Application

连接管适用于配电装置中各种圆型，半圆扇型电线，电力电缆之间的连接。GTL系列堵油型连接管。采用摩擦焊工艺制造，质量可靠。


These products are applicable connect the circular wire and hemicycle-sector wire in distribution equipment or power supply cables, GTL series connecting tube is made of friction- welding craft, both top quality.

| 型号 Type | D  | d    | D1 | L1 | L2 | L   |
|---------|----|------|----|----|----|-----|
| GTL-16  | 10 | 6    | 9  | 30 | 30 | 70  |
| GTL-25  | 12 | 7    | 10 | 33 | 30 | 75  |
| GTL-35  | 14 | 8.5  | 11 | 40 | 30 | 85  |
| GTL-50  | 16 | 9.8  | 13 | 42 | 32 | 95  |
| GTL-70  | 18 | 11.5 | 15 | 50 | 38 | 105 |
| GTL-95  | 21 | 13.5 | 17 | 50 | 40 | 110 |
| GTL-120 | 23 | 15   | 19 | 55 | 42 | 112 |
| GTL-150 | 25 | 17   | 21 | 55 | 44 | 118 |
| GTL-185 | 27 | 18.5 | 23 | 60 | 46 | 125 |
| GTL-240 | 30 | 21   | 26 | 60 | 54 | 130 |
| GTL-300 | 34 | 23   | 28 | 65 | 56 | 145 |
| GTL-400 | 38 | 27   | 30 | 70 | 60 | 155 |
| GTL-500 | 43 | 29   | 34 | 75 | 65 | 165 |

## GT-1

### 连接管（通孔型）

CONNECTING TUBE ( PASSING THROUGH )



#### ◎ 用途 | Application

连接管适用于配电装置中各种圆型，电力电缆之间的连接。GT系列通孔型连接管，采用T2铜管料制造。GL系列通孔型连接管，采用L3铝管制造，质量可靠。



These products are applicable to connect the circular wire and hemicycle-sector. GT series hole-passing connection tube is made of T2 copper tube. GL series hole-passing connection tube is made of L3 aluminium tube, both top quality.

| 型号 Type  | D  | d  | t   |
|----------|----|----|-----|
| GT-1-10  | 8  | 5  | 52  |
| GT-1-16  | 9  | 6  | 56  |
| GT-1-25  | 10 | 7  | 60  |
| GT-1-35  | 11 | 8  | 64  |
| GT-1-50  | 13 | 10 | 72  |
| GT-1-70  | 16 | 12 | 78  |
| GT-1-95  | 18 | 13 | 85  |
| GT-1-120 | 20 | 15 | 90  |
| GT-1-150 | 23 | 17 | 100 |
| GT-1-185 | 25 | 19 | 105 |
| GT-1-240 | 27 | 21 | 110 |
| GT-1-300 | 31 | 24 | 130 |
| GT-1-400 | 34 | 26 | 150 |
| GT-1-500 | 38 | 30 | 170 |
| GT-1-630 | 45 | 35 | 190 |

## GT-1

### 连接管 ( 通孔型 )

CONNECTING TUBE ( PASSING THROUGH )

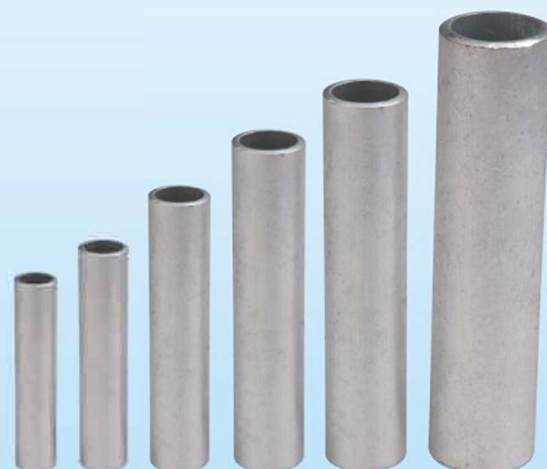

#### ◎ 用途 | Application

连接管适用于配电装置中各种圆型，电力电缆之间的连接。GT系列通孔型连接管，采用T2铜管料制造。GL系列通孔型连接管，采用L3铝管制造，质量可靠。



These products are applicable to connect the circular wire and hemicycle-sector. GT series hole-passing connection tube is made of T2 copper tube. GL series hole-passing connection tube is made of L3 aluminium tube, both top quality.

| 型号 Type  | D  | d  | L   |
|----------|----|----|-----|
| GL-1-10  | 9  | 5  | 52  |
| GL-1-16  | 10 | 6  | 56  |
| GL-1-25  | 11 | 7  | 62  |
| GL-1-35  | 12 | 8  | 67  |
| GL-1-50  | 15 | 10 | 76  |
| GL-1-70  | 17 | 11 | 87  |
| GL-1-95  | 19 | 13 | 92  |
| GL-1-120 | 21 | 15 | 98  |
| GL-1-150 | 23 | 17 | 108 |
| GL-1-185 | 25 | 19 | 114 |
| GL-1-240 | 28 | 21 | 118 |
| GL-1-300 | 34 | 24 | 135 |

## DT

### 系列铜、铝接线端子

COPPER ALUMINIUM CONNECTING TERMINALS



#### ◎ 用途 | Application

接线端子适用于配电装置中电线、电力电缆与电器设备的连接。DL 系列铝接线端子采用 ( L3 ) 铝棒料压制、DT 系列铜接线端子采用 ( T2 ) 铜棒压制。


Connecting terminals are suitable for the conjunction of wires, cables in the distribution equipment and the electrical equipment. DL series of aluminium connecting terminals are pressed with aluminium bar (L3), DT series of copper connecting terminals with copper bar (T2).

| 型号 Type | $\phi$ | D  | d    | L   | L1 | B    |
|---------|--------|----|------|-----|----|------|
| DT-10   | 8.5    | 9  | 5.3  | 62  | 28 | 16   |
| DT-16   | 8.5    | 10 | 6.5  | 68  | 30 | 16   |
| DT-25   | 8.5    | 11 | 7    | 70  | 33 | 18   |
| DT-35   | 10.5   | 12 | 8.5  | 80  | 36 | 20.5 |
| DT-50   | 10.5   | 14 | 9.5  | 85  | 38 | 23   |
| DT-70   | 12.5   | 16 | 11.5 | 95  | 43 | 26   |
| DT-95   | 12.5   | 18 | 13.5 | 104 | 46 | 28   |
| DT-120  | 14.5   | 20 | 15   | 112 | 49 | 30   |
| DT-150  | 14.5   | 22 | 16.5 | 120 | 51 | 34   |
| DT-185  | 16.5   | 25 | 18.5 | 125 | 55 | 37   |
| DT-240  | 16.5   | 27 | 21   | 136 | 60 | 40   |
| DT-300  | 18     | 31 | 23.5 | 155 | 66 | 50   |
| DT-400  | 21     | 34 | 26.5 | 170 | 75 | 50   |
| DT-500  | 21     | 38 | 29   | 190 | 75 | 60   |
| DT-630  | 21     | 45 | 35   | 220 | 85 | 80   |
| DT-800  | 21     | 50 | 38   | 260 | 85 | 100  |

## DL

### 系列铜、铝接线端子

COPPERALUMINIUM CONNECTING  
TERMINALS

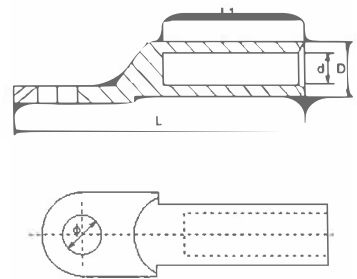

#### ◎ 用途 | Application

接线端子适用于配电装置中电线、电力电缆与电器设备的连接。DL 系列铝接线端子采用 (L3) 铝棒料压制、DT 系列铜接线端子采用 (T2) 铜棒压制。


Connecting terminals are suitable for the conjunction of wires, cables in the distribution equipment and the electrical equipment. DL series of alu-minum connecting terminals are pressed with aluminium bar(L3),DT series of copper connecting terminals with copper bar(T2).

| 型号 Type | $\phi$ | D  | d    | L   | L1  |
|---------|--------|----|------|-----|-----|
| DL-10   | 8.5    | 9  | 6    | 68  | 28  |
| DL-16   | 8.5    | 10 | 6    | 70  | 30  |
| DL-25   | 8.5    | 12 | 7    | 75  | 34  |
| DL-35   | 10.5   | 14 | 8.5  | 85  | 38  |
| DL-50   | 10.5   | 16 | 9.8  | 90  | 40  |
| DL-70   | 12.5   | 18 | 11.5 | 102 | 48  |
| DL-95   | 12.5   | 21 | 13.5 | 112 | 51  |
| DL-120  | 14.5   | 23 | 15   | 120 | 53  |
| DL-150  | 14.5   | 25 | 16.5 | 126 | 56  |
| DL-185  | 16.5   | 27 | 18.5 | 133 | 58  |
| DL-240  | 16.5   | 30 | 21   | 140 | 60  |
| DL-300  | 21     | 34 | 24   | 160 | 65  |
| DL-400  | 21     | 38 | 26   | 170 | 70  |
| DL-500  | 21     | 47 | 29   | 190 | 75  |
| DL-630  | 21     | 54 | 35   | 220 | 85  |
| DL-800  | 21     | 60 | 38   | 250 | 100 |

## DTL-1

### 系列铜、铝接线端子

COPPERALUMINIUM CONNECTING  
TERMINALS

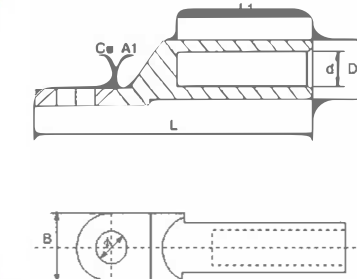

#### ◎ 用途 | Application

DTL 系列铜铝接线端子适用于配电装置中各种圆型、半圆扇型铝线、电力电缆与电气设备铜端的过渡连接。使用铝材为 L3, 铜材为 T2。产品采用摩擦焊工艺制造, 具有焊缝强度高, 通电性能好, 抗电化腐蚀, 使用寿命长等特点。

DTL series of copper-aluminum wiring terminals are suitable for transition connection of the circular aluminium wires, hemicycle-sector alu-minum wires, power supply cables in the distribution equipment and copper terminals of the electrical equipment. The material of aluminium and copper is that of L3 and T2 respectively. The technology of friction welding is wonderfully adopted. Therefore they have distinguishing features of strong weld intensity, good nature in electrification, resistant galvanic corrosion and long service life.


| 型号 Type   | $\phi$ | D  | d    | L   | L1 | B    |
|-----------|--------|----|------|-----|----|------|
| DTL-1-10  | 8.5    | 10 | 6    | 68  | 28 | 16   |
| DTL-1-16  | 8.5    | 11 | 6    | 70  | 30 | 16   |
| DTL-1-25  | 8.5    | 12 | 7    | 75  | 34 | 18   |
| DTL-1-35  | 10.5   | 14 | 8.5  | 85  | 38 | 20.5 |
| DTL-1-50  | 10.5   | 16 | 9.8  | 90  | 40 | 23   |
| DTL-1-70  | 12.5   | 18 | 11.5 | 102 | 48 | 26   |
| DTL-1-95  | 12.5   | 21 | 13.5 | 112 | 50 | 28   |
| DTL-1-120 | 14.5   | 23 | 15   | 120 | 53 | 30   |
| DTL-1-150 | 14.5   | 25 | 16.5 | 126 | 56 | 34   |
| DTL-1-185 | 16.5   | 27 | 18.5 | 133 | 58 | 37   |
| DTL-1-240 | 16.5   | 30 | 21   | 140 | 60 | 40   |
| DTL-1-300 | 21     | 34 | 23.5 | 160 | 65 | 50   |
| DTL-1-400 | 21     | 38 | 27   | 170 | 70 | 50   |
| DTL-1-500 | 21     | 47 | 29   | 225 | 75 | 60   |
| DTL-1-630 | -      | 54 | 35   | 245 | 80 | 80   |
| DTL-1-800 | -      | 60 | 38   | 270 | 90 | 100  |

## DTL-2

### 系列铜、铝接线端子

COPPER ALUMINIUM CONNECTING


TERMINALS

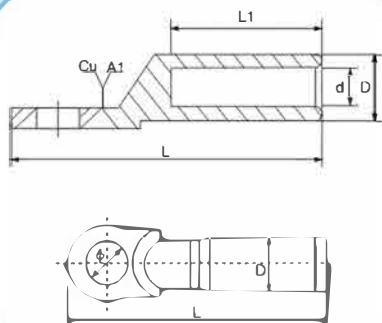

## DIN GL

### 标准引进铝接线管

ALUMINIUM CONNECTING TUBE

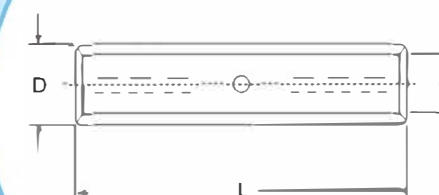

### ◎ 用途 | Application

DTL 系列铜铝接线端子适用于配电装置中各种圆型、半圆扇型铝线、电力电缆与电气设备铜端的过渡连接。使用铝材为 L3, 铜材为 T2。产品采用摩擦焊工艺制造, 具有焊缝强度高, 通电性能好, 抗电化腐蚀, 使用寿命长等特点。

DTL series of copper -aluminum wiring terminals are suitable for transi-tion connection of the circular aluminium wires ,hemicycle-sector alu-minium wires, power supply cables in the distribution equipment and cop - per terminals of the electrical equipment .The material of aluminium and copper is that of L3 and T2 respectively.The technology of friction weld - ing is wonderfully adopted.Therefore they have disinguishing features of strong weld intensity,good nature in electrification, resistant galvanic corrosion and long service life.


| 型号 Type   | $\phi$ | D  | d    | L   | L1 |
|-----------|--------|----|------|-----|----|
| DTL-2-16  | 13     | 16 | 5.5  | 87  | 42 |
| DTL-2-25  | 13     | 16 | 6.5  | 87  | 42 |
| DTL-2-35  | 13     | 16 | 8    | 87  | 42 |
| DTL-2-50  | 13     | 20 | 9    | 87  | 43 |
| DTL-2-70  | 13     | 20 | 11   | 87  | 43 |
| DTL-2-95  | 13     | 20 | 12.5 | 87  | 43 |
| DTL-2-120 | 13     | 25 | 13.5 | 111 | 60 |
| DTL-2-150 | 13     | 25 | 15.5 | 111 | 60 |
| DTL-2-185 | 13     | 32 | 17.5 | 116 | 60 |
| DTL-2-240 | 13     | 32 | 19.5 | 116 | 60 |
| DTL-2-300 | 13     | 34 | 22.5 | 120 | 62 |

| 型号 Type       | D    | d    | L   |
|---------------|------|------|-----|
| DIN GL - 10   | 10.0 | 5.0  | 55  |
| DIN GL - 16   | 12.0 | 5.6  | 55  |
| DIN GL - 25   | 12.0 | 7.0  | 70  |
| DIN GL - 35   | 14.0 | 8.0  | 85  |
| DIN GL - 50   | 16.0 | 10.0 | 85  |
| DIN GL - 70   | 18.5 | 11.5 | 105 |
| DIN GL - 95   | 22.5 | 13.5 | 105 |
| DIN GL - 120  | 23.0 | 14.8 | 105 |
| DIN GL - 150  | 25.0 | 16.5 | 125 |
| DIN GL - 185  | 28.5 | 18.3 | 125 |
| DIN GL - 240  | 32.0 | 21.0 | 125 |
| DIN GL - 300  | 34.0 | 23.4 | 125 |
| DIN GL - 400  | 38.5 | 26.0 | 210 |
| DIN GL - 400  | 42.5 | 28.0 | 330 |
| DIN GL - 500  | 44.0 | 29.0 | 210 |
| DIN GL - 500  | 46.0 | 31.0 | 210 |
| DIN GL - 625  | 52.0 | 35.0 | 330 |
| DIN GL - 800  | 58.0 | 40.0 | 350 |
| DIN GL - 1000 | 60.0 | 44.0 | 350 |

## DIN DL

### 铝鼻


ALUMINIUM CONNECTING TERMINALS

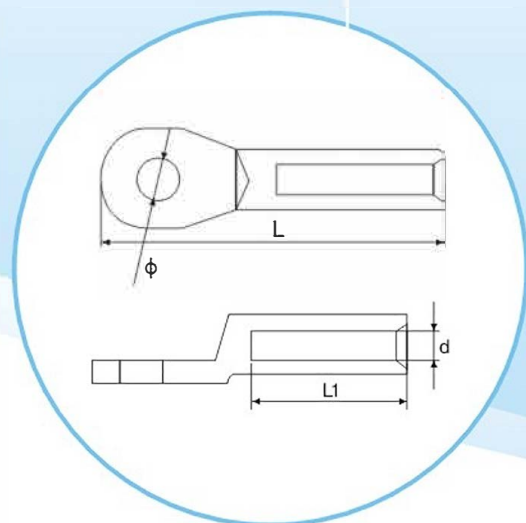

## AUS

### 引进铜接线端子

IMPORTED COPPER TERMINALS

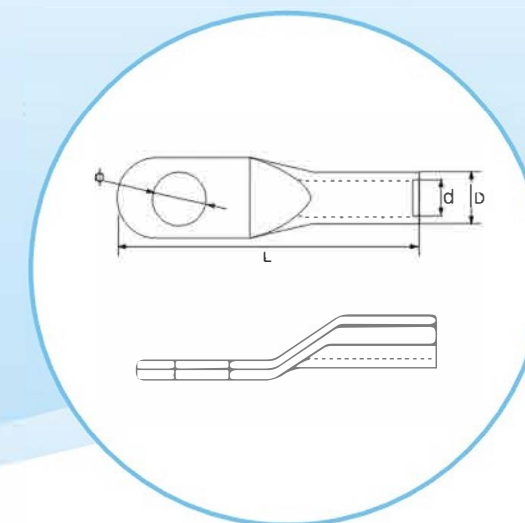

### ◎ 用途 | Application

适用于标称截面 1.5~1000mm<sup>2</sup> 电力电缆式电线的铜导体与电气设备的连接，特点，采用管料含铜量 > 99.9% 的高纯T2铜管制造，长期工作温度 -55℃~150℃，表面镀锡。


These products are suitable for the connection of copper conductors (section 1.5~1000mm<sup>2</sup>) in power cable with electronic equipment they are made of with higher 99.9percent pure copper tube T2 and coated with tin. working temperature -55℃~150℃.

| 型号 Type | 主要尺寸 Dimensions (mm) |      |      |    |
|---------|----------------------|------|------|----|
|         | φ                    | d    | L    | L1 |
| AU-16   | 8.4                  | 5.8  | 60   | 29 |
| AU-25   | 10.5                 | 6.8  | 62.5 | 29 |
| AU-35   | 10.5                 | 8    | 77   | 41 |
| AU-50   | 10.5                 | 9.8  | 78.5 | 42 |
| AU-70   | 10.5                 | 11.2 | 85   | 51 |
| AU-95   | 13                   | 13.2 | 90   | 55 |
| AU-120  | 13                   | 14.7 | 96   | 55 |
| AU-150  | 13                   | 16.3 | 106  | 59 |
| AU-185  | 13                   | 18.3 | 108  | 59 |
| AU-240  | 17                   | 21   | 124  | 69 |
| AU-300  | 17                   | 23.3 | 125  | 69 |

| 型号 Type  | φ                            | D    | d    | L    |
|----------|------------------------------|------|------|------|
| AUS-6    | φ 5.2, φ 6.2, φ 8.2          | 5.5  | 3.8  | 31.5 |
| AUS-10   | φ 6.2, φ 8.2                 | 6    | 4.5  | 34.5 |
| AUS-16   | φ 6.2, φ 8.2, φ 10.5         | 8.5  | 5.5  | 43.5 |
| AUS-25   | φ 6.2, φ 8.2, φ 10.5         | 10   | 7    | 48   |
| AUS-35   | φ 6.2, φ 8.2, φ 10.5, φ 12.5 | 12.5 | 8.2  | 52   |
| AUS-50   | φ 8.2, φ 10.5, φ 12.5        | 14.5 | 10   | 64   |
| AUS-70   | φ 8.2, φ 10.5, φ 12.5        | 16.5 | 11.5 | 68   |
| AUS-95   | φ 10.5, φ 12.5               | 19   | 13.5 | 78   |
| AUS-120  | φ 12.5, φ 16.5               | 21   | 15.5 | 86   |
| AUS-150  | φ 12.5, φ 16.5               | 23.5 | 17   | 94   |
| AUS-185  | φ 16.5                       | 25.5 | 19   | 101  |
| AUS-240  | φ 16.5                       | 29   | 21.5 | 111  |
| AUS-300  | φ 16.5, φ 20.5               | 32   | 24.5 | 119  |
| AUS-400  | φ 16.5, φ 20.5               | 38.5 | 27.5 | 140  |
| AUS-500  | φ 16.5, φ 20.5               | 42   | 31   | 150  |
| AUS-630  | φ 20.5                       | 44   | 34.5 | 160  |
| AUS-800  | φ 22.5                       | 52   | 40   | 195  |
| AUS-1000 | φ 22.5                       | 58   | 44   | 195  |

## AUS-TUBE

接线管  
CONNECTING TUBE

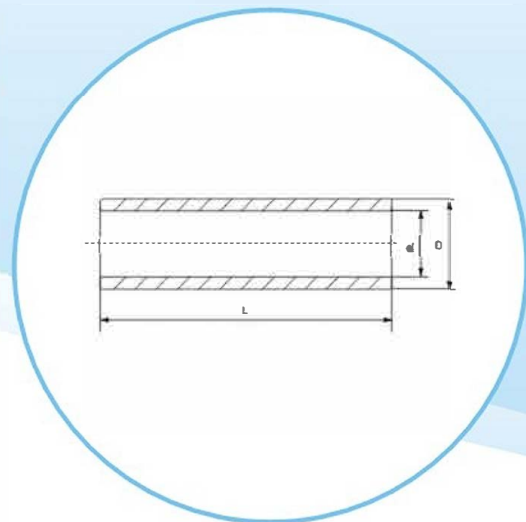

### ◎ 用途 | Application


适用于标称截面 1.5-1000mm<sup>2</sup> 电力电缆式电线的铜导体与电气设备的连接，特点，采用管料含铜量 > 99.9% 的高纯T2铜管制造，长期工作温度-55℃-150℃，表面镀锡。

These products are suitable for the connection of copper conductors (section 1.5-1000mm<sup>2</sup>) in power cable with electronic equipment they are made of with higher 99.9 percent pure copper tube T2 and coated with tin. working temperature -55℃-150℃.

| 型号 Type  | D    | d    | L   |
|----------|------|------|-----|
| AUS-6    | 5.5  | 3.8  | 30  |
| AUS-10   | 6    | 4.5  | 30  |
| AUS-16   | 8.5  | 5.5  | 50  |
| AUS-25   | 10   | 7    | 50  |
| AUS-35   | 12.5 | 8.2  | 50  |
| AUS-50   | 14.5 | 10   | 56  |
| AUS-70   | 16.5 | 11.5 | 56  |
| AUS-95   | 19   | 13.5 | 70  |
| AUS-120  | 21   | 15.5 | 70  |
| AUS-150  | 23.5 | 17   | 80  |
| AUS-185  | 23.5 | 19   | 85  |
| AUS-240  | 29   | 21.5 | 90  |
| AUS-300  | 32   | 24.5 | 100 |
| AUS-400  | 38.5 | 27.5 | 150 |
| AUS-500  | 42   | 31   | 160 |
| AUS-630  | 44   | 34.5 | 160 |
| AUS-800  | 52   | 40   | 200 |
| AUS-1000 | 58   | 58   | 200 |

## AL-CU

铜铝接线端子  
BIMETAL CABLE LUG (INSERT)

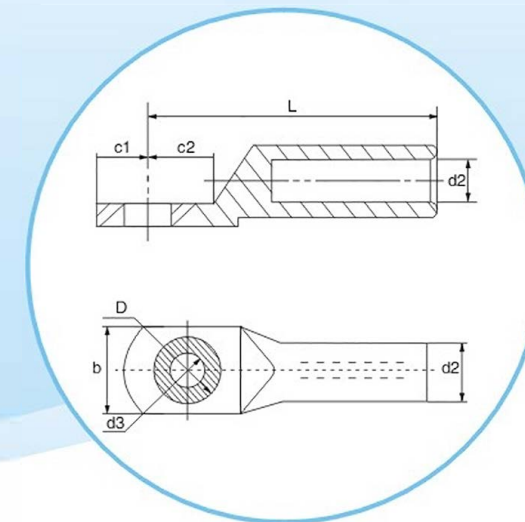

### ◎ 用途 | Application

AL-CU系列铜铝接线端子适用于配电装置中各种圆型、半圆扇型铝线、电力电缆与电气设备铜端的过渡连接。使用铝材为L3，铜材为T2。产品采用摩擦焊工艺制造，具有焊缝强度高，通电性能好，抗电化腐蚀，使用寿命长等特点。


AL-CU series of copper-aluminum wiring terminals are suitable for transition connection of the circular aluminium wires, hemicycle-sector alu-minium wires, power supply cables in the distribution equipment and copper terminals of the electrical equipment. The material of aluminium and copper is that of L3 and T2 respectively. The technology of friction welding is wonderfully adopted. Therefore they have distinguishing features of strong weld intensity, good nature in electrification, resistant galvanic corrosion and long service life.

| 型号 Type   | 主要尺寸 Dimensions (mm) |      |    |      |      |     |    |        |
|-----------|----------------------|------|----|------|------|-----|----|--------|
|           | C1                   | C2   | d1 | d2   | d3   | L   | b  | D      |
| AL-CU 35  | 14.5                 | 16   | 14 | 8    | 10.5 | 67  | 26 | 21     |
| AL-CU 50  | 14.5                 | 16.5 | 16 | 10   | 10.5 | 72  | 27 | 21     |
| AL-CU 70  | 16.5                 | 18   | 18 | 11.5 | 13   | 86  | 32 | 24.5   |
| AL-CU 95  | 17.5                 | 19   | 22 | 13.5 | 13   | 90  | 35 | 26.5   |
| AL-CU 120 | 16.5                 | 19   | 22 | 15   | 13   | 91  | 35 | 3526.5 |
| AL-CU 150 | 18.5                 | 21.5 | 25 | 16.5 | 13   | 103 | 35 | 26.5   |
| AL-CU 185 | 22                   | 22.5 | 28 | 18.5 | 13   | 106 | 40 | 26.5   |
| AL-CU 240 | 25.5                 | 26   | 32 | 21   | 17   | 116 | 45 | 31     |

## CCT

### 型铜接线夹

COPPER CONNECTION CLAMP

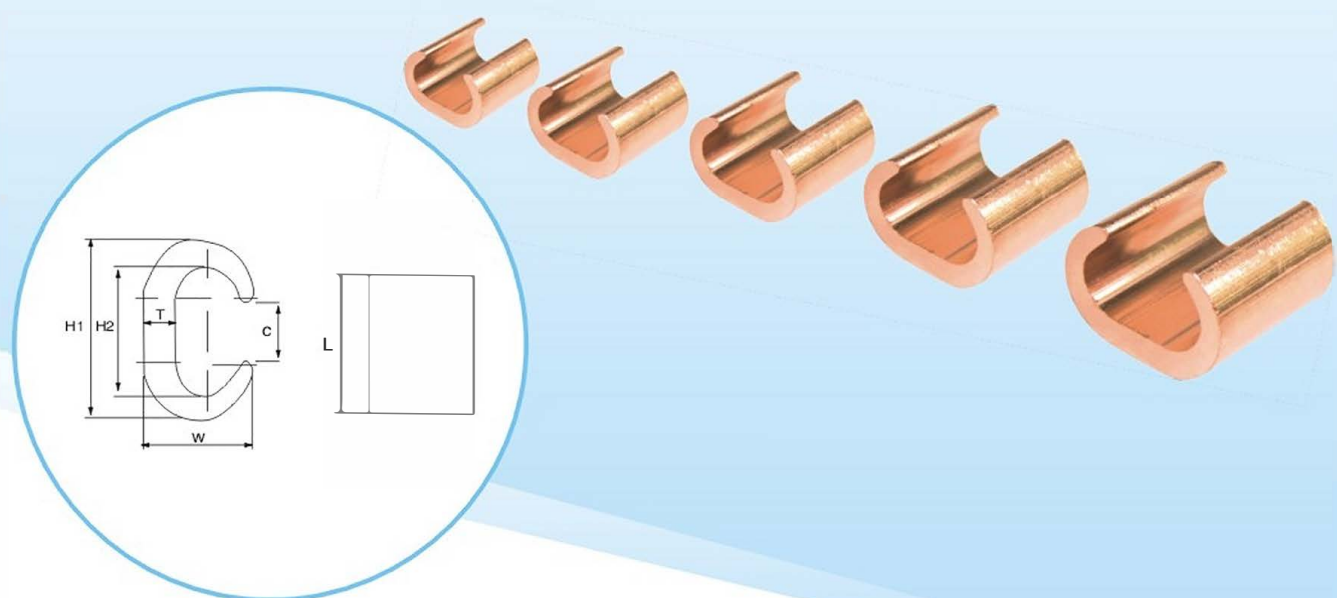

#### ◎ 用途 | Application

适用于铜绞线的连接，采用 C 型铜材制成。


It is suitable for the connection of copper splicing wire, made of C shaped copper material.

| 型号 Type | 适用导线规格 (mm <sup>2</sup> )<br>Suitable section of conductor | 主要尺寸 Dimensions (mm) |      |      |    |     |      |
|---------|------------------------------------------------------------|----------------------|------|------|----|-----|------|
|         |                                                            | H1                   | H2   | W    | L  | T   | C    |
| CCT-10  | 7.5-11                                                     | 9.5                  | 6.3  | 6.2  | 12 | 1.6 | 4    |
| CCT-16  | 11.5-16                                                    | 11.8                 | 7.8  | 7.3  | 13 | 2   | 5    |
| CCT-20  | 14-20                                                      | 12.8                 | 8.6  | 9.7  | 13 | 2.9 | 5.4  |
| CCT-26  | 21-26                                                      | 14.7                 | 10.2 | 10.9 | 16 | 3.2 | 6.5  |
| CCT-44  | 27-44                                                      | 19                   | 12.4 | 14.4 | 20 | 4   | 8.5  |
| CCT-60  | 45-60                                                      | 21                   | 15.4 | 15.1 | 22 | 4   | 9.7  |
| CCT-76  | 61-76                                                      | 24.4                 | 17.3 | 17.6 | 22 | 5   | 10.8 |
| CCT-98  | 77-98                                                      | 27.8                 | 20.8 | 18.8 | 25 | 5   | 12.8 |
| CCT-122 | 99-122                                                     | 29.8                 | 22.1 | 21.2 | 26 | 5.5 | 13.5 |
| CCT-154 | 123-154                                                    | 34                   | 25.7 | 24.4 | 28 | 6   | 17   |
| CCT-190 | 155-190                                                    | 37                   | 28.5 | 25.4 | 35 | 6   | 17.4 |
| CCT-240 | 191-240                                                    | 40                   | 30.2 | 28.5 | 40 | 7   | 19   |
| CCT-288 | 241-288                                                    | 44.5                 | 34.7 | 31.1 | 45 | 7   | 22.3 |
| CCT-365 | 289-365                                                    | 47.5                 | 37.7 | 34   | 50 | 7   | 25   |
| CCT-450 | 366-450                                                    | 57                   | 42.5 | 41   | 60 | 10  | 28   |
| CCT-560 | 451-560                                                    | 62                   | 46   | 45   | 65 | 11  | 21   |
| CCT-700 | 561-700                                                    | 68                   | 52   | 29.5 | 70 | 12  | 34   |

## CCA

### 型铜接线夹

COPPER CONNECTION CLAMP

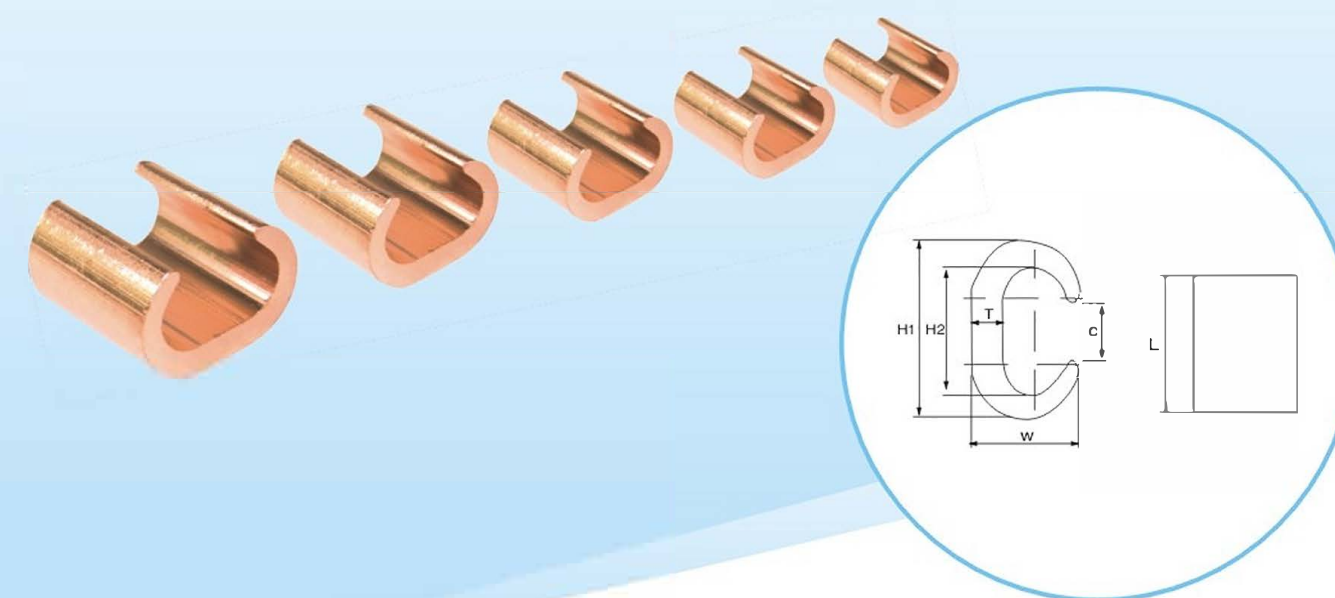

#### ◎ 用途 | Application


适用于铜绞线的连接，采用 C 型铜材制成。

It is suitable for the connection of copper splicing wire, made of C shaped copper material.

| 型号 Type | 适用导线规格 (mm <sup>2</sup> )<br>Suitable section of conductor | 主要尺寸 Dimensions (mm) |      |      |      |     |      |
|---------|------------------------------------------------------------|----------------------|------|------|------|-----|------|
|         |                                                            | H1                   | H2   | W    | L    | T   | C    |
| CCA-1   | 16~16                                                      | 22                   | 17   | 11   | 12   | 2.5 | 5.8  |
| CCA-2   | 16~16 16~35                                                | 20                   | 15   | 13.5 | 22   | 3   | 8.3  |
| CCA-3   | 25~25 25~35 35~35                                          | 24.7                 | 16.7 | 14.5 | 22   | 4   | 9.4  |
| CCA-4   | 16~50 25~50 35~50                                          | 27.8                 | 20   | 17.5 | 23   | 6   | 10.3 |
| CCA-5   | 16~70 25~70 35~70                                          | 26.7                 | 20   | 17.5 | 24   | 4   | 11.7 |
| CCA-6   | 25~95 35~95                                                | 31                   | 23.5 | 19.5 | 25   | 5   | 13.2 |
| CCA-7   | 50~50 50~70                                                | 34                   | 21   | 21.5 | 24   | 8   | 10.8 |
| CCA-8   | 70~70                                                      | 34                   | 23   | 21.5 | 25   | 7   | 11   |
| CCA-9   | 70~95 95~95                                                | 37.4                 | 26.3 | 21.7 | 25.5 | 6   | 14.5 |
| CCA-10  | 70~150 95~150 70~185 95~185                                | 46                   | 34.7 | 30   | 30.5 | 7.5 | 19.6 |
| CCA-11  | 95~120 120~120                                             | 42.6                 | 31.5 | 25   | 29   | 7   | 16.6 |
| CCA-12  | 150~150 185~185                                            | 54                   | 39   | 31.7 | 32.5 | 9.8 | 19   |


## C45

插针式  
PLUG-IN NEEDLE

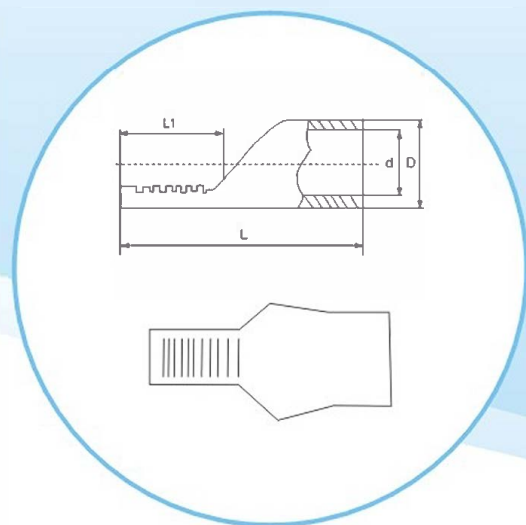

## JT/JTL/JL

铜铝接线夹系列  
COPPER AND COPPER-ALUMINIUM  
CONTACT CLIP

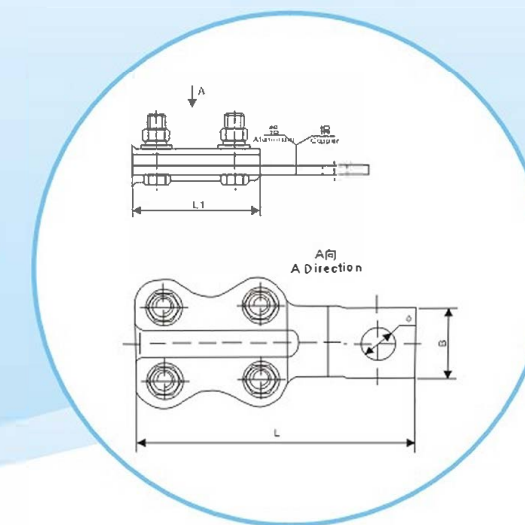

### ◎ 用途 | Application

适用于配电装置中电线、电力电缆与电气设备的连接，采用 T2 铜管压制。

Suitable for the connection of the wires in contribution equipment and power supply cables with electronic apparatus, adopting T2 copper tube pressing.


| 型号 Type          | D   | d  | L  | L1   |
|------------------|-----|----|----|------|
| 10 <sup>2</sup>  | 7.5 | 5  | 34 | 13.5 |
| 16 <sup>2</sup>  | 8.5 | 6  | 35 | 14   |
| 25 <sup>2</sup>  | 10  | 7  | 36 | 14.5 |
| 35 <sup>2</sup>  | 11  | 8  | 37 | 15   |
| 50 <sup>2</sup>  | 13  | 10 | 41 | 15.5 |
| 70 <sup>2</sup>  | 16  | 12 | 45 | 16   |
| 95 <sup>2</sup>  | 18  | 14 | 50 | 18   |
| 120 <sup>2</sup> | 20  | 15 | 57 | 20   |
| 150 <sup>2</sup> | 22  | 17 | 67 | 24   |
| 185 <sup>2</sup> | 24  | 19 | 77 | 28   |
| 240 <sup>2</sup> | 26  | 21 | 85 | 31   |

| 型号 Type         | 适用导线<br>Conductor<br>(mm) | 主要尺寸 Dimensions (mm) |     |    |    |
|-----------------|---------------------------|----------------------|-----|----|----|
|                 |                           | φ                    | L   | L1 | B  |
| JT、JTL、JL-100A  | 16-25                     | 10.5                 | 71  | 35 | 22 |
| JT、JTL、JL-200A  | 25-35                     | 10.5                 | 71  | 43 | 22 |
| JT、JTL、JL-300A  | 35-50                     | 12.5                 | 81  | 49 | 25 |
| JT、JTL、JL-400A  | 50-70                     | 12.5                 | 95  | 52 | 29 |
| JT、JTL、JL-500A  | 70-95                     | 14.5                 | 106 | 56 | 31 |
| JT、JTL、JL-600A  | 95-120                    | 14.5                 | 112 | 60 | 32 |
| JT、JTL、JL-800A  | 120-150                   | 14.5                 | 114 | 64 | 35 |
| JT、JTL、JL-1000A | 150-185                   | 14.5                 | 124 | 66 | 35 |

## DT-2

### 系列铜双孔型接线夹



SERIES COPPER DOUBLE HOLE WIRING CLAMP

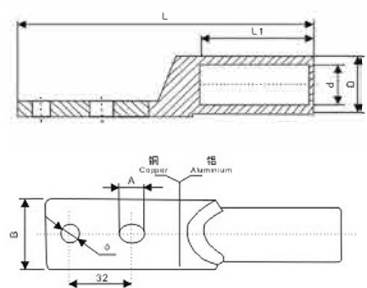

## SL

### 铜铝过渡设备线夹 (74定型)

CU-AL TRANSITION TERMINAL CONNECTOR

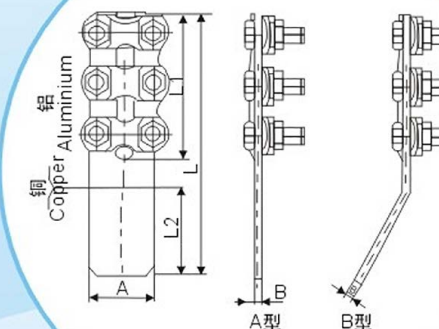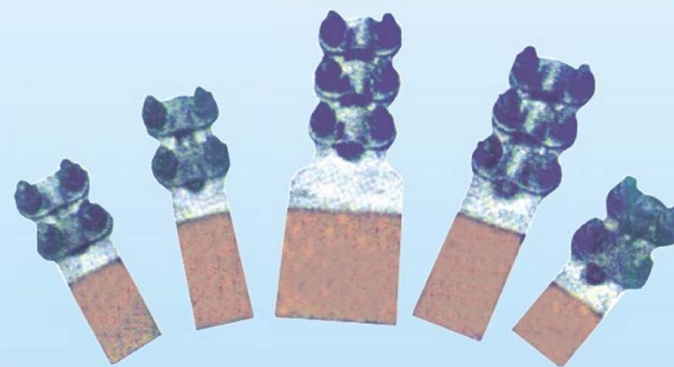


| 型号<br>Type | 主要尺寸 Dimensions ( mm ) |    |      |     |    |    |    |
|------------|------------------------|----|------|-----|----|----|----|
|            | $\phi$                 | D  | d    | L   | L1 | B  | A  |
| DT2-35     | 10.5                   | 16 | 8.5  | 120 | 40 | 22 | 13 |
| DT2-50     | 10.5                   | 16 | 9.8  | 120 | 42 | 22 | 13 |
| DT2-70     | 10.5                   | 18 | 11.5 | 138 | 48 | 28 | 13 |
| DT2-95     | 10.5                   | 21 | 13.5 | 148 | 50 | 28 | 13 |
| DT2-120    | 10.5                   | 23 | 15   | 155 | 53 | 34 | 13 |
| DT2-150    | 10.5                   | 25 | 16.5 | 157 | 56 | 37 | 13 |
| DT2-185    | 10.5                   | 27 | 18.5 | 163 | 58 | 40 | 13 |
| DT2-240    | 10.5                   | 30 | 21   | 168 | 60 | 40 | 13 |

| 型号 Type                            | 适用导线<br>Conductor<br>(mm) | 主要尺寸 Dimensions ( mm ) |   |     |    |     |
|------------------------------------|---------------------------|------------------------|---|-----|----|-----|
|                                    |                           | A                      | B | L1  | L2 | L   |
| SL-1(单孔)<br>SL-1(Single hole)      | 35-50                     | 40                     | 5 | 65  | 42 | 120 |
| SL-2(单孔)<br>SL-2(Single hole)      | 70-95                     | 40                     | 5 | 80  | 45 | 136 |
| SL-3(双孔)<br>SL-3(Double hole)      | 35-50                     | 40                     | 5 | 65  | 65 | 145 |
| SL-4(双孔)<br>SL-4(Double hole)      | 70-95                     | 40                     | 5 | 80  | 80 | 175 |
| SL-5(双孔)<br>SL-5(Double hole)      | 120-150                   | 50                     | 6 | 125 | 85 | 225 |
| SL-6(双孔)<br>SL-6(Double hole)      | 185-240                   | 50                     | 6 | 125 | 85 | 225 |
| SL-7(四孔)<br>SL-7(Four hole)        | 120-150                   | 80                     | 6 | 125 | 85 | 239 |
| SL-8(四孔)<br>SL-8(Four hole)        | 185-240                   | 80                     | 6 | 125 | 85 | 239 |
| SL-9(双孔30°)<br>SL-9(Double hole)   | 120-150                   | 50                     | 6 | 125 | 85 | 239 |
| SL-10(双孔30°)<br>SL-10(Double hole) | 185-240                   | 50                     | 6 | 125 | 85 | 239 |
| SL-11(四孔30°)<br>SL-11(Four hole)   | 120-150                   | 80                     | 6 | 125 | 85 | 239 |
| SL-12(四孔30°)<br>SL-12(Four hole)   | 185-240                   | 80                     | 6 | 125 | 85 | 239 |



## SLG

铜铝过滤设备线夹 ( 98国标 )  
CU-AL TRANSITION TERMINAL CONNECTOR

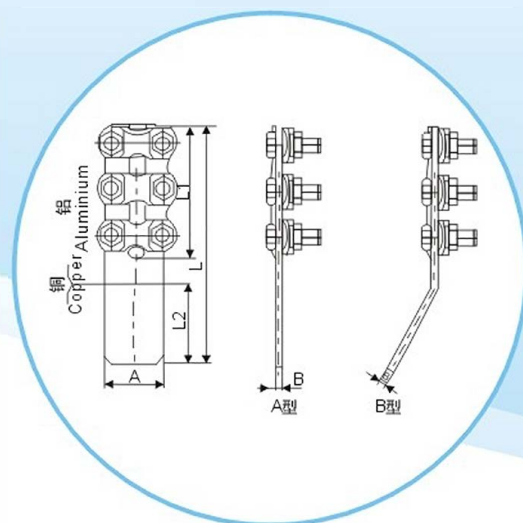

## SBG

变压器用铜铝线夹 ( 特制带扣 )  
COPPER-ALUMINIUM CLAMP FOR  
TRANSFORMER

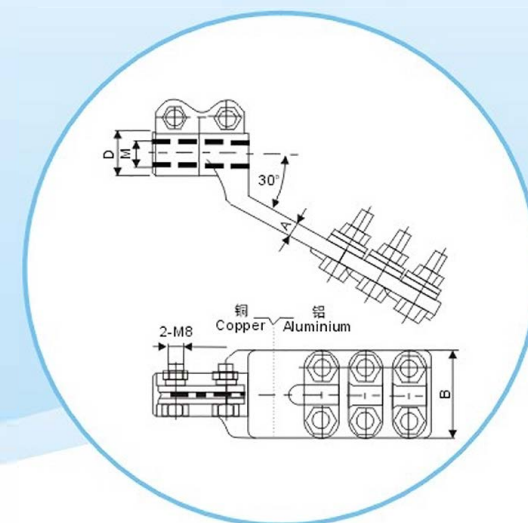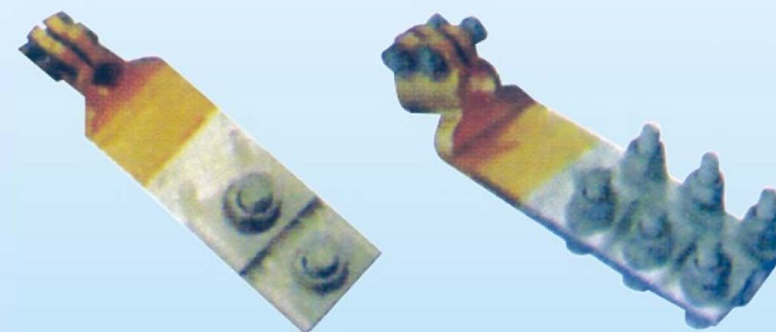



| 型号<br>Type | 适用导线<br>Conductor<br>external<br>Diameter(mm) | 螺栓个数<br>Number<br>of bolt | 主要尺寸 Dimensions ( mm ) |   |     |     |    |
|------------|-----------------------------------------------|---------------------------|------------------------|---|-----|-----|----|
|            |                                               |                           | A                      | B | L   | L1  | L2 |
| SLG-1A/1B  | 35-50                                         | 4                         | 40                     | 5 | 145 | 65  | 65 |
| SLG-2A/2B  | 70-95                                         | 4                         | 40                     | 5 | 175 | 80  | 80 |
| SLG-3A/3B  | 120-150                                       | 6                         | 50                     | 6 | 225 | 125 | 85 |
| SLG-4A/4B  | 185-240                                       | 6                         | 50                     | 6 | 225 | 125 | 85 |

| 型号<br>Type | 适用导杆螺纹<br>Applicable guide<br>bar thread(mm) | 主要尺寸 Dimensions ( mm ) |    |     |    |
|------------|----------------------------------------------|------------------------|----|-----|----|
|            |                                              | D                      | M  | A   | B  |
| SBG-M12    | 12                                           | 22                     | 12 | 6.7 | 50 |
| SBG-M14    | 14                                           | 26                     | 14 | 6.7 | 50 |
| SBG-M16    | 16                                           | 26                     | 16 | 7.0 | 50 |
| SBG-M18    | 18                                           | 28                     | 18 | 7.8 | 60 |
| SBG-M20    | 20                                           | 30                     | 20 | 7.8 | 60 |

## JB-TL

### 铜铝并沟线夹


COPPER-ALUMINIUM PARALLEL-GROOVE CLAMP

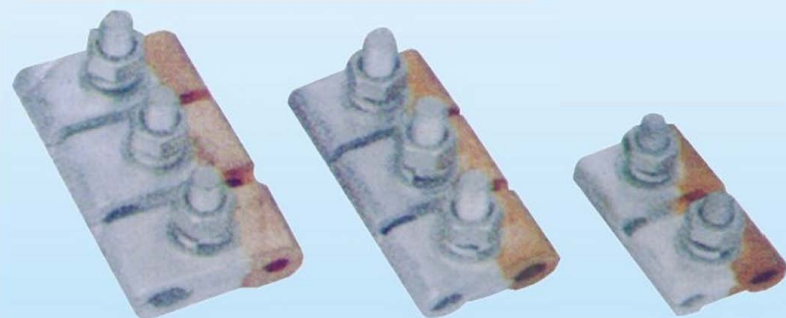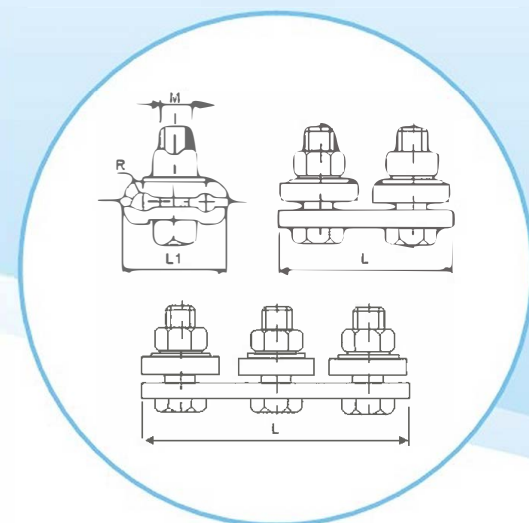

## JB

### 铝并沟线夹

ALUMINIUM PARALLEL-GROOVE CLAMP

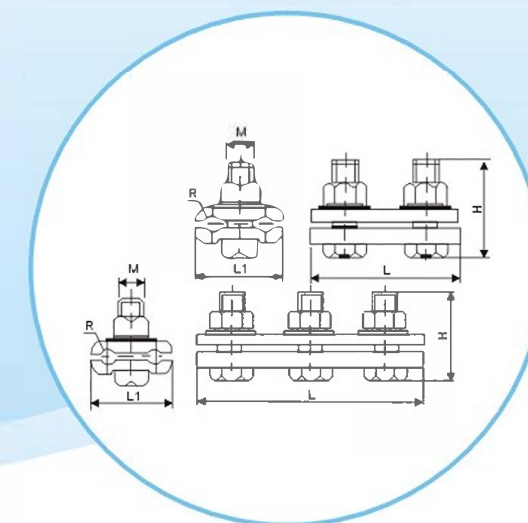


| 型号<br>Type | 适用铝线<br>Applicable<br>aluminium<br>moode | 适用铜线<br>Applicable<br>Coppe<br>wire | 主要尺寸<br>Dimensions ( mm ) |     |    |
|------------|------------------------------------------|-------------------------------------|---------------------------|-----|----|
|            |                                          |                                     | L1                        | L   | M  |
| JB-TL-10   | 35-50                                    | 16-25                               | 40                        | 70  | 12 |
| JB-TL-11   | 35-50                                    | 35-50                               | 40                        | 70  | 12 |
| JB-TL-21   | 70-95                                    | 35-50                               | 50                        | 100 | 12 |
| JB-TL-22   | 70-95                                    | 70-95                               | 50                        | 100 | 12 |
| JB-TL-31   | 120-195                                  | 35-50                               | 63                        | 108 | 12 |
| JB-TL-32   | 120-195                                  | 70-95                               | 63                        | 108 | 12 |
| JB-TL-33   | 120-150                                  | 120-150                             | 63                        | 108 | 12 |
| JB-TL-41   | 185-240                                  | 35-50                               | 65                        | 110 | 12 |
| JB-TL-42   | 185-240                                  | 70-95                               | 65                        | 110 | 12 |
| JB-TL-43   | 185-240                                  | 120-150                             | 65                        | 110 | 12 |
| JB-TL-44   | 185-240                                  | 185-240                             | 65                        | 110 | 12 |

| 型号<br>Type | 适用铜胶线截面<br>Applicable<br>section(mm²) | 简图<br>FLG | 主要尺寸 Dimensions ( mm ) |     |    |     |    | 重量<br>Weight<br>(kg) |
|------------|---------------------------------------|-----------|------------------------|-----|----|-----|----|----------------------|
|            |                                       |           | L1                     | L   | M  | R   | H  |                      |
| JB-1       | 25-35                                 | 1         | 44                     | 90  | 12 | 4.5 | 48 | 0.7                  |
| JB-2       | 50-70                                 | 1         | 50                     | 90  | 16 | 6.0 | 60 | 1.0                  |
| JB-3       | 100-120                               | 2         | 56                     | 124 | 16 | 7.0 | 65 | 1.9                  |

**JBL**

异型铝并沟线夹


ALUMINIUM SPECIFIC FORM PARALLELPARALLEKL  
-GROAVE CLAMP

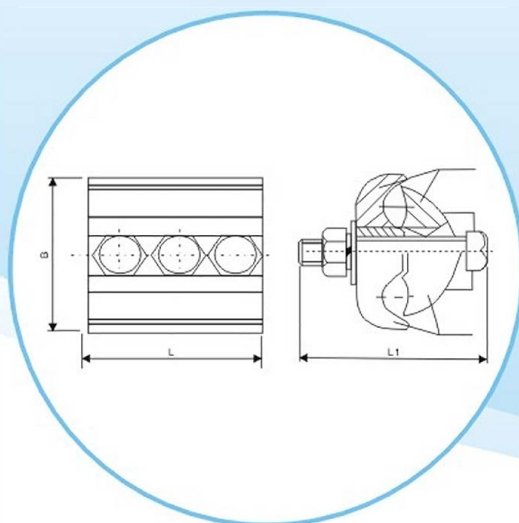

**CAPG**

型铜铝并沟线夹

COPPER-ALUMINIUM PG CLAMP

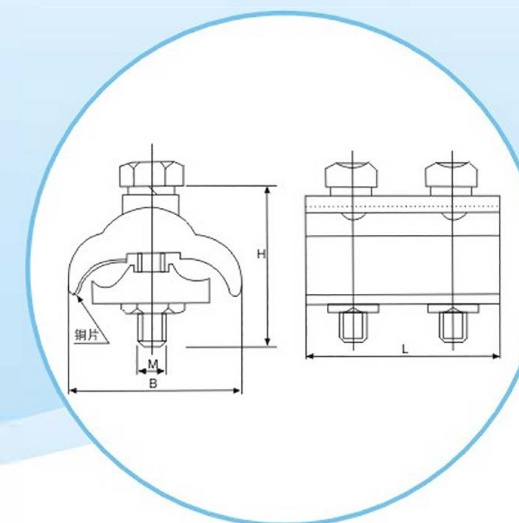

| 型号 Type      | 适用铝线<br>Applicable<br>aluminium<br>moode | 主要尺寸 Dimensions ( mm ) |    |    |
|--------------|------------------------------------------|------------------------|----|----|
|              |                                          | L                      | L1 | B  |
| JBL-16-120A  | 16-120                                   | 45                     | 55 | 46 |
| JBL-16-120B  |                                          | 64                     | 55 | 46 |
| JBL-50-240A  | 50-240                                   | 45                     | 70 | 60 |
| JBL-50-240B  |                                          | 70                     | 70 | 60 |
| JBL-120-400A | 120-400                                  | 90                     | 75 | 74 |
| JBL-120-400B |                                          | 90                     | 75 | 74 |


| 型号Type  | 适用导线范围 ( mm <sup>2</sup> )<br>Sutialble section of conductor | 紧固螺栓数量<br>bolt  | L   | B  | H  | M  |
|---------|--------------------------------------------------------------|-----------------|-----|----|----|----|
| CAPG-A1 | 铜Cu6-50mm <sup>2</sup> 铝Al 16-70mm <sup>2</sup>              | 单螺栓Sing bolt    | 25  | 42 | 40 | 8  |
| CAPG-A2 | 铜Cu10-95mm <sup>2</sup> 铝Al 25-150mm <sup>2</sup>            | 单螺栓Sing bolt    | 30  | 47 | 45 | 8  |
| CAPG-B1 | 铜Cu6-50mm <sup>2</sup> 铝Al 16-70mm <sup>2</sup>              | 双螺栓Double bolts | 40  | 42 | 45 | 8  |
| CAPG-B2 | 铜Cu10-95mm <sup>2</sup> 铝Al 25-150mm <sup>2</sup>            | 双螺栓Double bolts | 50  | 46 | 50 | 8  |
| CAPG-B3 | 铜Cu25-185mm <sup>2</sup> 铝Al 35-200mm <sup>2</sup>           | 双螺栓Double bolts | 64  | 58 | 60 | 10 |
| CAPG-C  | 铜Cu35-240mm <sup>2</sup> 铝Al 35-300mm <sup>2</sup>           | 三螺栓Tri-bolts    | 105 | 65 | 70 | 10 |

注：采用无钎料焊接工艺制造，在一体式铝制件上熔合焊有铜片层，整体强度高。  
无钎料结构使铜铝过渡处，无额外电阻。接受客户定制。

## APG

### 型铝并沟线夹


ALUMINUM PARALLEL-GROOVE CLAMP

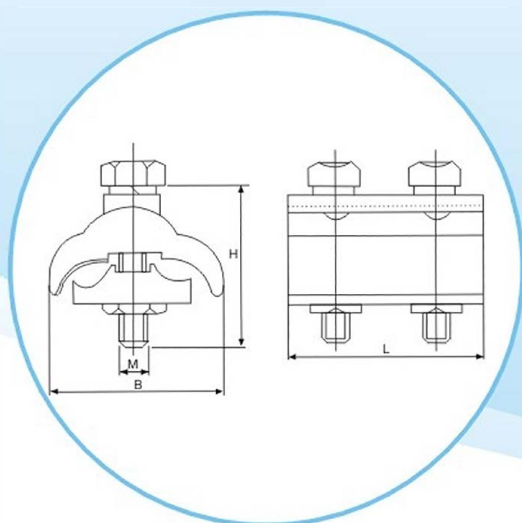

## QLS

### 尼龙电缆固定头

NYLON CABLE GLAND

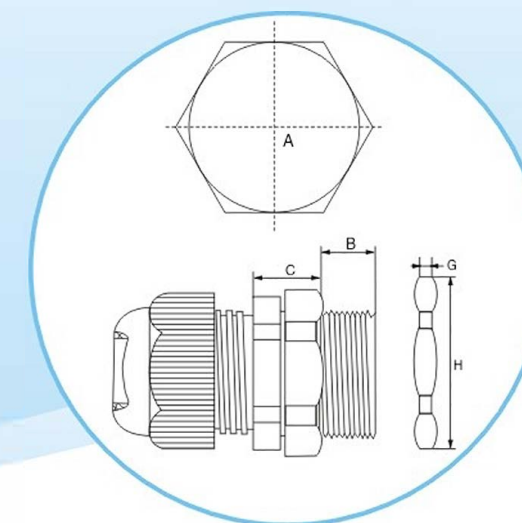

#### ◎ 用途 | Application

采用UL认可之尼龙 66 料制成，防火等级94V2，夹紧圈为耐油橡胶材料。其特点是夹紧圈特殊设计，拉力强，对电机不造成损伤。不须将固定头解体，电缆可直接穿上紧即可，省时方便。它一般用在机械控制箱、配电箱、机器、电器电缆固定用。

Nylon 66,94V2,certificated by UL,the back attachec sponge glue Imported. Feature : Special designation , good strenghtsile and none dam-age to electrical machine. Not need to dismetgrate the terminal,cable can be insterted through diresty then tighten easy and save time. Used for machinery control box, distribution plate,machine and electrical etc.


| 型号Type | 适用导线范围 (mm <sup>2</sup> )<br>Sutiable section of conductor | 紧固螺栓数量<br>bolt  | L   | B  | H  | M  |
|--------|------------------------------------------------------------|-----------------|-----|----|----|----|
| APG-A1 | 铝Al 16-70mm <sup>2</sup>                                   | 单螺栓Sing bolt    | 25  | 35 | 40 | 8  |
| APG-A2 | 铝Al 16-150mm <sup>2</sup>                                  | 单螺栓Sing bolt    | 30  | 47 | 45 | 8  |
| APG-B1 | 铝Al16-35mm <sup>2</sup>                                    | 双螺栓Double bolts | 34  | 28 | 35 | 6  |
| APG-B2 | 铝Al16-70mm <sup>2</sup>                                    | 双螺栓Double bolts | 40  | 42 | 45 | 8  |
| APG-B3 | 铝Al16-150mm <sup>2</sup>                                   | 双螺栓Double bolts | 50  | 45 | 50 | 8  |
| APG-B4 | 铝Al 25-200mm <sup>2</sup>                                  | 双螺栓Double bolts | 62  | 58 | 60 | 10 |
| APG-C1 | 铝Al 25-200mm <sup>2</sup>                                  | 三螺栓Tri-bolts    | 93  | 58 | 60 | 10 |
| APG-C2 | 铝Al 35-300mm <sup>2</sup>                                  | 三螺栓Tri-bolts    | 105 | 65 | 70 | 10 |

注：接受客户定制。

| 型号<br>Type | 固定头尺寸 Cable Gland Size |      |     |                     | 螺帽尺寸 Looking Nut Size |      |               |
|------------|------------------------|------|-----|---------------------|-----------------------|------|---------------|
|            | A                      | B    | C   | 适用范围<br>Gable Range | G                     | H    | 包装<br>Packing |
| PG-7       | 15.5                   | 8.1  | 5.0 | 3-6                 | 5.0                   | 19.5 | 100pcs        |
| PG-9       | 19.0                   | 7.5  | 5.0 | 4-8                 | 5.0                   | 21.0 |               |
| PG-11      | 21.5                   | 7.9  | 5.0 | 5-10                | 5.0                   | 25.5 |               |
| PG-13.5    | 24.0                   | 9.5  | 5.0 | 6-12                | 5.0                   | 28.5 |               |
| PG-16      | 26.0                   | 11.0 | 6.5 | 10-14               | 6.5                   | 32.0 |               |
| PG-21      | 31.5                   | 11.0 | 6.5 | 13-18               | 6.5                   | 38.0 | 50pcs         |
| PG-29      | 38                     | 20   | 7.5 | 18-25               | 7.5                   | 45   |               |
| PG-36      | 54                     | 23   | 8.8 | 22-32               | 8.2                   | 66.5 | 20pcs         |
| PG-42      | 60                     | 23   | 8.8 | 30-38               | 8.2                   | 78   |               |
| PG-48      | 65                     | 23   | 8.8 | 34-44               | 8.2                   | 78   |               |

## PG / M

铜制电缆防水固定头  
METAL CABLE GLAND

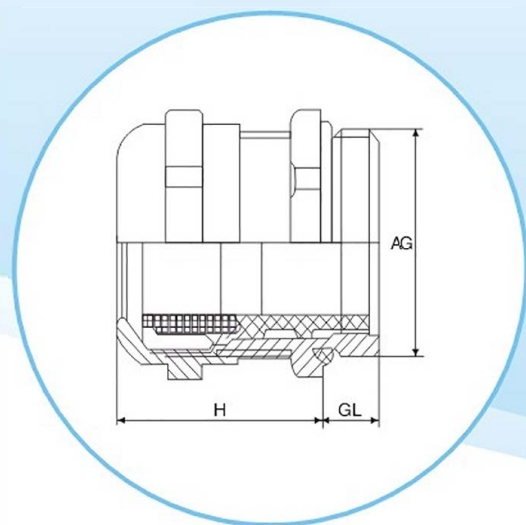

### PG 系列


| 规格      | 适用电缆<br>Cable Range | 螺纹外径<br>Thread O.D. | 螺纹长度<br>Thread Length | 扳手径<br>Spanner Size | 包装<br>Std.Pkg. Purchase |
|---------|---------------------|---------------------|-----------------------|---------------------|-------------------------|
| PG 7    | 3~6.5               | 12.5                | 5                     | 14                  | 10                      |
| PG 9    | 4~8                 | 15.2                | 6                     | 17                  | 10                      |
| PG 11   | 5~10                | 18.6                | 6                     | 20                  | 10                      |
| PG 13.5 | 6~12                | 20.4                | 6.5                   | 22                  | 10                      |
| PG 16   | 10~14               | 22.5                | 6.5                   | 24                  | 10                      |
| PG 21   | 13~18               | 28.3                | 7                     | 30                  | 10                      |
| PG 29   | 18~25               | 37                  | 8                     | 40                  | 8                       |
| PG 36   | 22~32               | 47                  | 8                     | 50                  |                         |
| PG 42   | 32~38               | 54                  | 9                     | 57                  |                         |
| PG 48   | 37~44               | 59.3                | 10                    | 64                  |                         |

### M 系列

| 规格   | 适用电缆<br>Cable Range | 螺纹外径<br>Thread O.D. | 螺纹长度<br>Thread Length | 扳手径<br>Spanner Size | 包装<br>Std.Pkg. Purchase |
|------|---------------------|---------------------|-----------------------|---------------------|-------------------------|
| M 12 | 3~6.5               | 12                  | 5                     | 14                  | 10                      |
| M 16 | 4~8                 | 16                  | 6                     | 20                  | 10                      |
| M 20 | 6~12                | 20                  | 6                     | 24                  | 10                      |
| M 25 | 13~18               | 25                  | 7                     | 30                  | 10                      |
| M 32 | 18~25               | 32                  | 8                     | 40                  | 8                       |
| M 40 | 22~32               | 40                  | 8                     | 50                  |                         |
| M 50 | 32~38               | 50                  | 9                     | 57                  |                         |
| M 63 | 37~44               | 63                  | 10                    | 68                  |                         |

## WCJC

引进铜接线夹  
IMPORETD COPPER JOINTING CLAMP

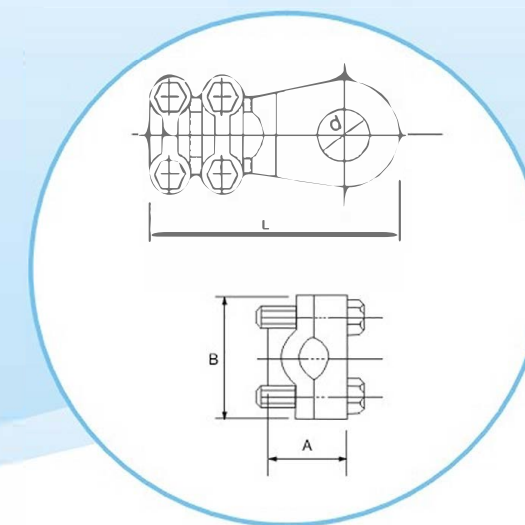

### ● 用途 | Application

适用于户内配电装置中电气设备与各种电线电缆的过渡连接，采用H62 黄铜压铸制造，表面镀镍。

It is suitable for transitional cpnnecion of electric apparatus with wire and cable in indoor distribution equipment, made of brass by die-cast and coated nickle.

| 型号<br>Type | 适用导线<br>Conductor<br>(mm) | 主要尺寸 Dimensions (mm) |    |    |     |
|------------|---------------------------|----------------------|----|----|-----|
|            |                           | L                    | A  | B  | d   |
| WCJC-1     | 16                        | 37                   | 10 | 21 | 7.5 |
| WCJC-2     | 25~35                     | 48                   | 13 | 22 | 11  |
| WCJC-3     | 50~70                     | 60                   | 17 | 31 | 11  |
| WCJC-4     | 120~150                   | 70                   | 23 | 35 | 15  |
| WCJC-5     | 210~250                   | 90                   | 30 | 46 | 17  |
| WCJC-6     | 300                       | 115                  | 32 | 56 | 21  |
| WCJC-7     | 400~500                   | 125                  | 35 | 62 | 23  |



## QPZ

### 引进球避雷针

#### IMPORETD BALL TYPE LIGHTING ROD

适用于高楼顶上避雷，采用铜制造。

It is suitable for anti-lighting on top of high building, made of copper tube.

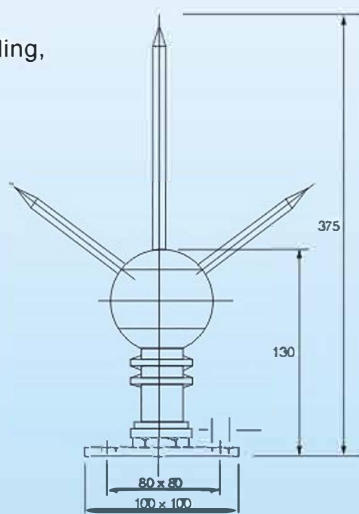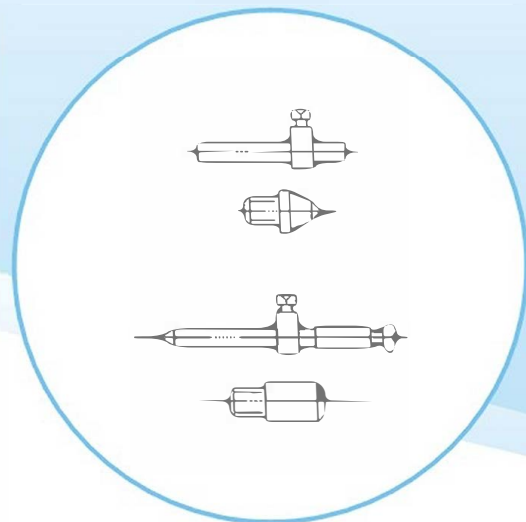

## 其它类金具

### OTHER FITTING



JBL/JBT异沟线夹  
JBL/JBT Series parallel groove clamp specific form insulation cover



APG 铝并沟线夹 (出口型)  
APG Aluminium clamps




JBC 穿刺线夹  
JBC Series piercing clamp



SC 双孔接线端子  
SC Double hole copper terminals



JTL 铜铝设备线夹  
JTL Copper-aluminium jointing clamp

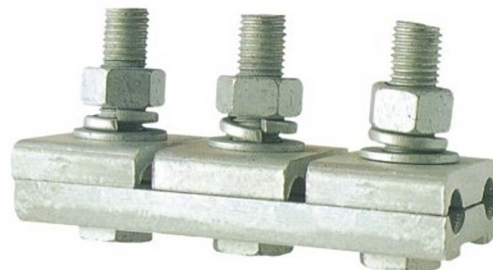

JB 铝并沟线夹 (型材)  
JB Parallel-groove clamps aluminium



JG 双孔接线端子  
JG Double hole copper terminals




DT 双孔接线端子  
DT Double hole copper terminals



## KNF

### 型穿刺线地线夹


TYPE PIERCING GROUND CONNECTORS

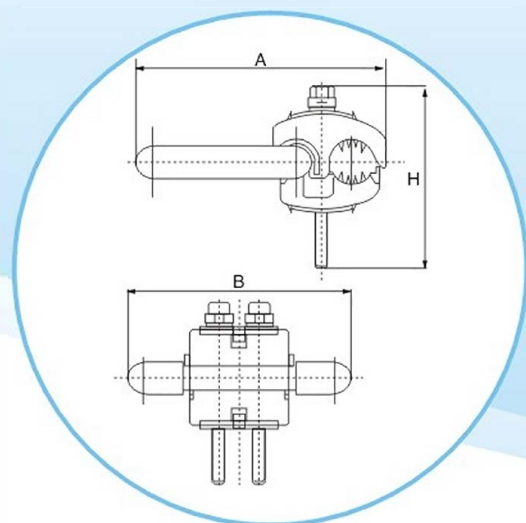

#### ◎ 用途 | Application

适用于户内配电装置中电气设备与各种电线电缆的过渡连接，采用H62黄铜压铸制造，表面镀镍。

It is suitable for transitional connection of electric apparatus with wire and cable in indoor distribution equipment, made of brass by die-cast and coated nickel.

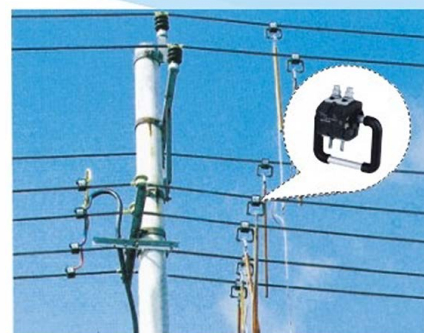

应用图例 Applied Diagram example


#### ◎ 主要技术参数 | Main technical parameter

| 型号<br>Type    | 适用电压<br>(KV)<br>Applicable voltage | 适用导线<br>(mm <sup>2</sup> )<br>Applicable lead | 主要尺寸 (mm)<br>Main dimensions |     |       | 标称电流<br>(A)<br>Nominal current | 螺栓数量<br>(枚)<br>Bolt number | 穿刺深度<br>(mm)<br>Piercing depth |
|---------------|------------------------------------|-----------------------------------------------|------------------------------|-----|-------|--------------------------------|----------------------------|--------------------------------|
|               |                                    |                                               | A                            | B   | H     |                                |                            |                                |
| KNF10-240/150 | 10KV、1KV<br>通用                     | 150~240                                       | 160                          | 140 | 112.5 | 476                            | 2                          | 4.5~6                          |
| KNF10-185/95  |                                    | 95~185                                        | 152                          | 140 | 112.5 | 476                            | 2                          | 4.5~6                          |
| KNF10-95/25   |                                    | 25~95                                         | 144.5                        | 140 | 92.5  | 257                            | 2                          | 4.5~6                          |
| KNF10-25/95   |                                    | 25~95                                         | 62                           | 102 | 85    | 276                            | 1                          | 4.5~6                          |

## KNF10

### 型穿刺线地线夹 (10KV)


TYPE PIERCING GROUND CONNECTORS (10KV)

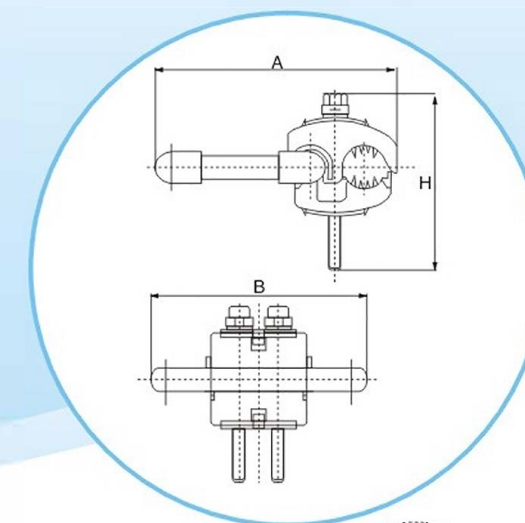

#### ◎ 用途 | Application

适用于10KV 配变线路接地保护。

Applicable to earthing protection of 10KV overhead insulated lead.

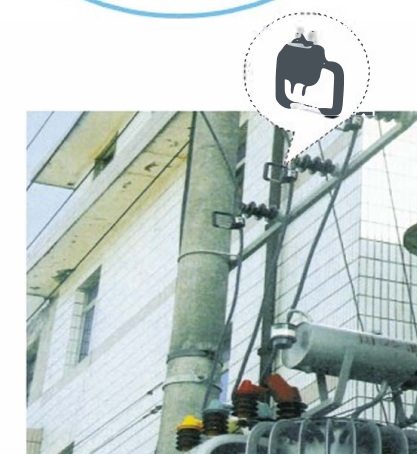

应用图例 Applied Diagram example

#### ◎ 主要技术参数 | Main technical parameter

| 型号<br>Type          | 适用电压<br>(KV)<br>Applicable voltage | 适用导线<br>(mm <sup>2</sup> )<br>Applicable lead | 主要尺寸 (mm)<br>Main dimensions |     |     | 标称电流<br>(A)<br>Nominal current | 螺栓数量<br>(枚)<br>Bolt number | 主要应用<br>Main application                                                                                |
|---------------------|------------------------------------|-----------------------------------------------|------------------------------|-----|-----|--------------------------------|----------------------------|---------------------------------------------------------------------------------------------------------|
|                     |                                    |                                               | A                            | B   | H   |                                |                            |                                                                                                         |
| KNF10-185/95<br>(配) | 10                                 | 95~185                                        | 152                          | 140 | 113 | 476                            | 2                          | 电力施工时配变线路的安全接地保护。<br>the grounded safety protection of main circuitry when electric power construction. |
| KNF10-95/25<br>(配)  | 10                                 | 25~95                                         | 148.5                        | 140 | 98  | 257                            | 2                          |                                                                                                         |


## KN10

### 型系列高压绝缘穿刺线夹



HIGH-VOLTAGE INSULATION PIERCING CONNECTORS(IPC)

10KV 系列产品 ( 高压系列 )

10KV Series products ( High voltage series )

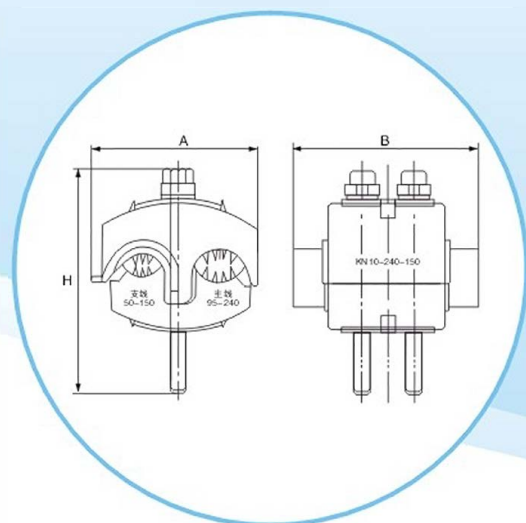

穿刺效果图 Photo of thrusting result

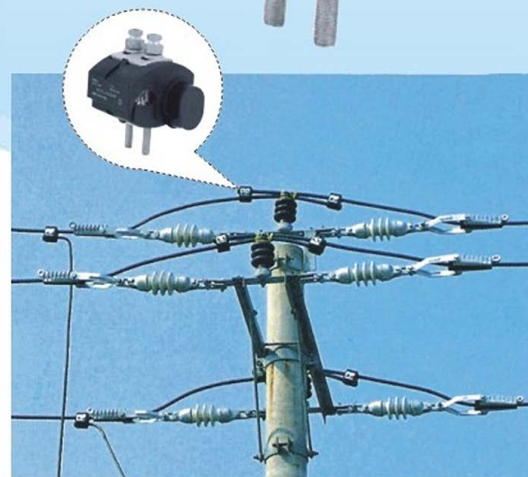

#### ◎ 用途 | Application

适用于 10KV 架空绝缘导线的支接和接续。

Used for 10KV over head insulated conducting wire connection and continuation.

#### ◎ 主要技术参数 | Main technical parameter

| 型号<br>Type   | 适用导线 ( mm <sup>2</sup> )<br>Applicable lead |                   | 主要尺寸 ( mm )<br>Main dimensions |      |       | 标称电流<br>( A )<br>Nominal current | 螺栓数量<br>( 枚 )<br>Bolt number | 穿刺深度<br>( mm )<br>Piercing depth |
|--------------|---------------------------------------------|-------------------|--------------------------------|------|-------|----------------------------------|------------------------------|----------------------------------|
|              | 主线<br>Main line                             | 支线<br>Branch line | A                              | B    | H     |                                  |                              |                                  |
| KN10-240/240 | 95~240                                      | 95~240            | 89                             | 85.5 | 112.5 | 530                              | 2                            | 4.5~6                            |
| KN10-240/150 | 95~240                                      | 50~150            | 84                             | 83   | 112.5 | 366                              | 2                            | 4.5~6                            |
| KN10-185/50  | 95~185                                      | 16~50             | 78.5                           | 77.5 | 112.5 | 180                              | 2                            | 4.5~6                            |
| KN10-95/70   | 25~95                                       | 16~70             | 68                             | 82.5 | 107.5 | 226                              | 2                            | 4.5~6                            |


\* 如需特殊规格型号, 请电话咨询。

Please phone us for special specification and type.

## To-JTK

### 圆形预绝缘端头

INSULATED RING TERMINALS

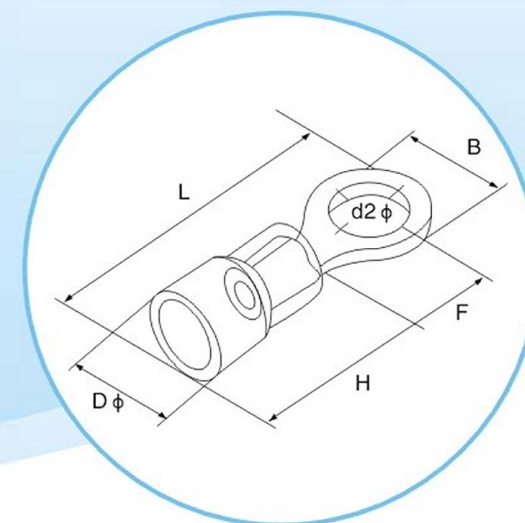

导线截面: 0.5~1.5mm<sup>2</sup>(美国线规22~16)最大电流Imx=19A

紫铜: 0.7mm

| 型号<br>ITEMNO | 镁知螺<br>栓号 | 尺寸 DIMENSION  |         |         |         |         |           | 颜色<br>color |
|--------------|-----------|---------------|---------|---------|---------|---------|-----------|-------------|
|              |           | 螺栓口直径<br>D2 φ | B<br>mm | L<br>mm | F<br>mm | H<br>mm | D φ<br>mm |             |
| RV1.25-3     | #4        | 3.2mm         | 5.7     | 5.7     | 4.95    | 10.0    | 4.3       | 红<br>Red    |
| RVS1.25-3.5  | #6        | 3.7mm         | 5.7     | 5.7     | 4.95    |         |           |             |
| RVM1.25-3.5  | #6        | 3.7mm         | 6.6     | 6.6     | 6.3     |         |           |             |
| RVL1.25-3.5  | #6        | 3.7mm         | 7.2     | 7.2     | 7.0     |         |           |             |
| RVS1.25-4    | #8        | 4.3mm         | 6.6     | 6.6     | 6.3     |         |           |             |
| RVL1.25-4    | #8        | 4.3mm         | 8.0     | 8.0     | 7.0     |         |           |             |
| RVS1.25-5    | #10       | 5.3mm         | 8.0     | 8.0     | 7.0     |         |           |             |
| RVL1.25-5    | #10       | 5.3mm         | 9.5     | 9.5     | 8.0     |         |           |             |
| RVLL1.25-5   | #10       | 5.3mm         | 11.6    | 11.6    | 11.1    |         |           |             |
| RVS1.25-6    | 1/4       | 6.5mm         | 9.5     | 9.5     | 8.0     |         |           |             |
| RV1.25-6     | 1/4       | 6.5mm         | 11.6    | 11.6    | 11.1    |         |           |             |
| RV1.25-8     | 5/16      | 8.4mm         | 11.6    | 11.6    | 11.1    |         |           |             |
| RV1.25-10    | 3/8       | 10.5mm        | 13.6    | 13.6    | 13.9    |         |           |             |
| RVL1.25-10   | 3/8       | 10.5mm        | 19.2    | 19.2    | 16.0    |         |           |             |
| RV1.25-12    | /         | 13.0mm        | 19.2    | 19.2    | 16.0    |         |           |             |

To-JTK

圆形预绝缘端头

INSULATED RING TERMINALS

导线截面: 1.5~2.5mm<sup>2</sup>(美国线规16~14)最大电流Imx=27A

紫铜0.8mm

| 型号<br>ITEMNO | 尺寸 DIMENSION |        |      |      |      |      |     | 颜色<br>color |
|--------------|--------------|--------|------|------|------|------|-----|-------------|
|              | 螺知螺<br>栓号    | 螺栓口直径  | B    | L    | F    | H    | Dφ  |             |
|              |              | D2φ    | mm   | mm   | mm   | mm   | mm  |             |
| RV2-3        | #4           | 3.2mm  | 6.6  | 17.8 | 4.3  | 10.0 | 4.9 | 蓝<br>Blue   |
| RVS2-3.5     | #6           | 3.7mm  | 6.6  | 17.8 | 4.3  |      |     |             |
| RVM2-3.5     | #6           | 3.7mm  | 6.6  | 21.0 | 7.0  |      |     |             |
| RVL2-3.5     | #6           | 3.7mm  | 8.5  | 22.5 | 7.75 |      |     |             |
| RVS2-4       | #8           | 4.3mm  | 6.6  | 21.0 | 7.0  |      |     |             |
| RVL2-4       | #8           | 4.3mm  | 8.5  | 22.5 | 7.75 |      |     |             |
| RVS2-5       | #10          | 5.3mm  | 8.5  | 22.5 | 7.75 |      |     |             |
| RVL2-5       | #10          | 5.3mm  | 9.5  | 22.5 | 7.25 |      |     |             |
| RVS2-6       | 1/4          | 6.5mm  | 9.5  | 25.0 | 10.0 |      |     |             |
| RV2-6        | 1/4          | 6.5mm  | 12.0 | 27.6 | 11.0 |      |     |             |
| RV2-8        | 5/16         | 8.4mm  | 12.0 | 27.6 | 11.0 |      |     |             |
| RV2-10       | 3/8          | 10.5mm | 13.6 | 30.2 | 13.9 |      |     |             |
| RVL2-10      | 3/8          | 10.5mm | 19.2 | 35.0 | 16.0 |      |     |             |
| RV2-10       | 1/2          | 13.0mm | 19.2 | 35.0 | 16.0 |      |     |             |

导线截面: 2.5~4mm<sup>2</sup>(美国线规14~12)最大电流Imx=37A

紫铜1.0mm

| 型号<br>ITEMNO | 尺寸 DIMENSION |        |      |      |      |      |     | 颜色<br>color |
|--------------|--------------|--------|------|------|------|------|-----|-------------|
|              | 螺知螺<br>栓号    | 螺栓口直径  | B    | L    | F    | H    | Dφ  |             |
|              |              | D2φ    | mm   | mm   | mm   | mm   | mm  |             |
| RV3.5-4      | #8           | 4.3mm  | 8.0  | 24.5 | 7.7  | 12.5 | 6.2 | 黑<br>Black  |
| RVS3.5-5     | #10          | 5.3mm  | 8.0  | 24.5 | 7.7  |      |     |             |
| RVM3.5-5     | #10          | 5.3mm  | 9.5  | 25.5 | 8.3  |      |     |             |
| RVL3.5-5     | #10          | 5.3mm  | 12.0 | 27.9 | 7.7  |      |     |             |
| RV3.5-6      | 1/4          | 6.5mm  | 12.0 | 27.9 | 7.7  |      |     |             |
| RV3.5-8      | 5/16         | 8.4mm  | 15.0 | 32.0 | 13.5 |      |     |             |
| RV3.5-10     | 3/8          | 10.5mm | 15.0 | 32.0 | 13.5 |      |     |             |

导线截面: 4~6mm<sup>2</sup>(美国线规12~10)最大电流Imx=48A

紫铜1.0mm


| 型号<br>ITEMNO | 尺寸 DIMENSION |        |      |      |      |      |     | 颜色<br>color |
|--------------|--------------|--------|------|------|------|------|-----|-------------|
|              | 螺知螺<br>栓号    | 螺栓口直径  | B    | L    | F    | H    | Dφ  |             |
|              |              | D2φ    | mm   | mm   | mm   | mm   | mm  |             |
| RV5.5-3.5    | #6           | 3.7mm  | 7.2  | 21.4 | 5.9  | 12.5 | 6.7 | 黄<br>Yellow |
| RVS5.5-4     | #8           | 4.3mm  | 7.2  | 21.4 | 5.9  |      |     |             |
| RVL5.5-4     | #8           | 4.3mm  | 9.5  | 25.5 | 8.3  |      |     |             |
| RV5.5-5      | #10          | 5.3mm  | 9.5  | 25.5 | 8.3  |      |     |             |
| RV5.5-6      | 1/4          | 6.5mm  | 12.0 | 30.0 | 11.0 |      |     |             |
| RV5.5-8      | 5/16         | 8.4mm  | 15.0 | 33.7 | 13.7 |      |     |             |
| RV5.5-10     | 3/8          | 10.5mm | 15.0 | 33.7 | 13.7 |      |     |             |
| RV5.5-12     | 1/2          | 13.0mm | 19.2 | 38.1 | 16.0 |      |     |             |



Ocsonic

预绝缘端子


PRE-INSULATING TERMINAL

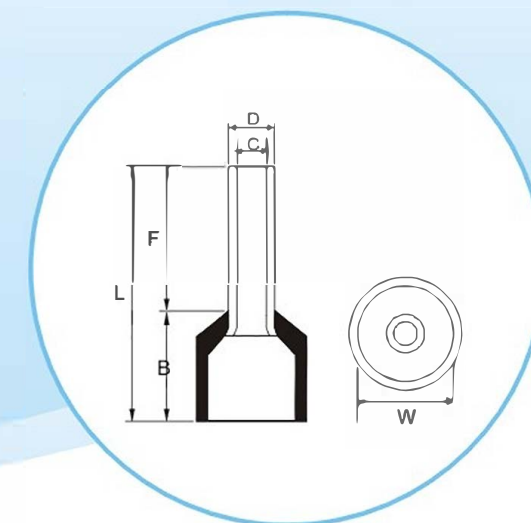

管型预绝缘端子 Tube pre-insulating terminal

| 型号 Type | 尺寸 /Dimensions (mm) |      |      |      |      | 导线截面           |                 | 颜色    | 说 明                                       | 使用工具    |
|---------|---------------------|------|------|------|------|----------------|-----------------|-------|-------------------------------------------|---------|
|         | F                   | L    | C    | D φ  | W    | A.W.G          | mm <sup>2</sup> | color |                                           |         |
| E50-20  | 20.0                | 36.0 | 10.3 | 10.9 | 15.0 | 1/0            | 50.0            | 橄欖 色  | 工作极限温度：<br>105℃<br>Ui=300V<br>端头材质<br>紫铜管 | HX-05WF |
| E50-25  | 25.0                | 41.0 |      |      |      |                |                 |       |                                           |         |
| E70-20  | 20.0                | 37.0 | 13.5 | 14.3 | 16.0 | 2/0            | 70.0            | 黄 色   |                                           |         |
| E70-25  | 25.0                | 42.0 |      |      |      |                |                 |       |                                           |         |
| E70-27  | 27.0                | 44.0 |      |      |      |                |                 |       |                                           |         |
| E95-25  | 25.0                | 44.0 | 14.5 | 15.3 | 18.5 | 3/0            | 95.0            | 红 色   |                                           |         |
| E120-27 | 27.0                | 47.0 | 16.5 | 17.5 | 20.3 | 4/0            | 120.0           | 蓝 色   |                                           |         |
| E120-32 | 32.0                | 52.6 |      |      |      |                |                 |       |                                           |         |
| E150-25 | 25.0                | 50.6 | 19.6 | 20.6 | 23.4 | 250/300<br>MCM | 150.0           | 黄 色   |                                           |         |
| E150-27 | 27.0                | 52.6 |      |      |      |                |                 |       |                                           |         |
| E150-32 | 32.0                | 57.6 |      |      |      |                |                 |       |                                           |         |

## 预绝缘端子 PRE-INSULATING TERMINAL

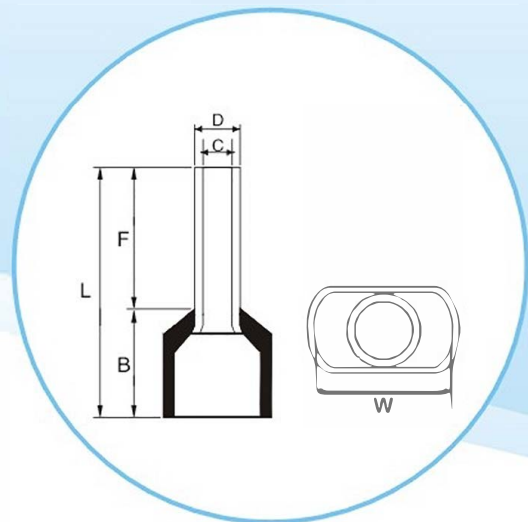

双线管型预绝缘端子 Crewel tube pre-insulating terminal

| 型号 Type | 导线截面  |                 | 尺寸 Dimensions (mm) |    |     |     |      | 截面绝缘套颜色 |     | 说明                                         |
|---------|-------|-----------------|--------------------|----|-----|-----|------|---------|-----|--------------------------------------------|
|         | A.W.G | mm <sup>2</sup> | L                  | F  | D   | C   | W    | 德国用     | 法国用 |                                            |
| TE0508  | 2×22  | 2×0.5           | 14.5               | 8  | 1.8 | 1.5 | 5.0  | 白色      | 橙色  | 工作极限温度:<br>105℃<br>Ui=300V<br>端头材质:<br>紫铜管 |
| TE7508  | 2×20  | 2×0.75          | 14.7               | 8  | 2.1 | 1.8 | 5.5  | 蓝色      | 白色  |                                            |
| TE7510  | 2×20  | 2×0.75          | 16.7               | 10 | 2.1 | 1.8 | 5.5  | 蓝色      | 白色  |                                            |
| TE1008  | 2×18  | 2×1.0           | 15.1               | 8  | 2.3 | 2.0 | 5.5  | 红色      | 黄色  |                                            |
| TE1010  | 2×18  | 2×1.0           | 17.1               | 10 | 2.3 | 2.0 | 5.5  | 红色      | 黄色  |                                            |
| TE1508  | 2×16  | 2×1.5           | 15.5               | 8  | 2.6 | 2.3 | 6.4  | 红色      | 红色  |                                            |
| TE1512  | 2×16  | 2×1.5           | 19.5               | 12 | 2.6 | 2.3 | 6.4  | 红色      | 红色  |                                            |
| TE2510  | 2×14  | 2×2.5           | 18.5               | 10 | 3.3 | 2.9 | 8.0  | 灰色      | 灰色  |                                            |
| TE2513  | 2×14  | 2×2.5           | 21.5               | 13 | 3.3 | 2.9 | 8.0  | 灰色      | 灰色  |                                            |
| TE4012  | 2×12  | 2×4             | 23.1               | 12 | 4.2 | 3.8 | 8.8  | 橙色      | 灰色  |                                            |
| TE6014  | 2×10  | 2×6             | 26.1               | 14 | 5.3 | 4.9 | 9.5  | 黑色      | 绿色  |                                            |
| TE10-14 | 2×8   | 2×10            | 26.6               | 14 | 6.9 | 6.5 | 12.6 | 褐(棕)色   | 黄色  |                                            |
| TE16-14 | 2×6   | 2×16            | 33.3               | 14 | 8.7 | 8.3 | 19.0 | 乳白色     | 绿色  |                                            |


## OT/UT 冷压接线端子及接头 TERMINALS OF COLA OMPRESSED MADE



## OT/UT

### 冷压接线端子及接头


TERMINALS OF COLA OMPRESSED MADE

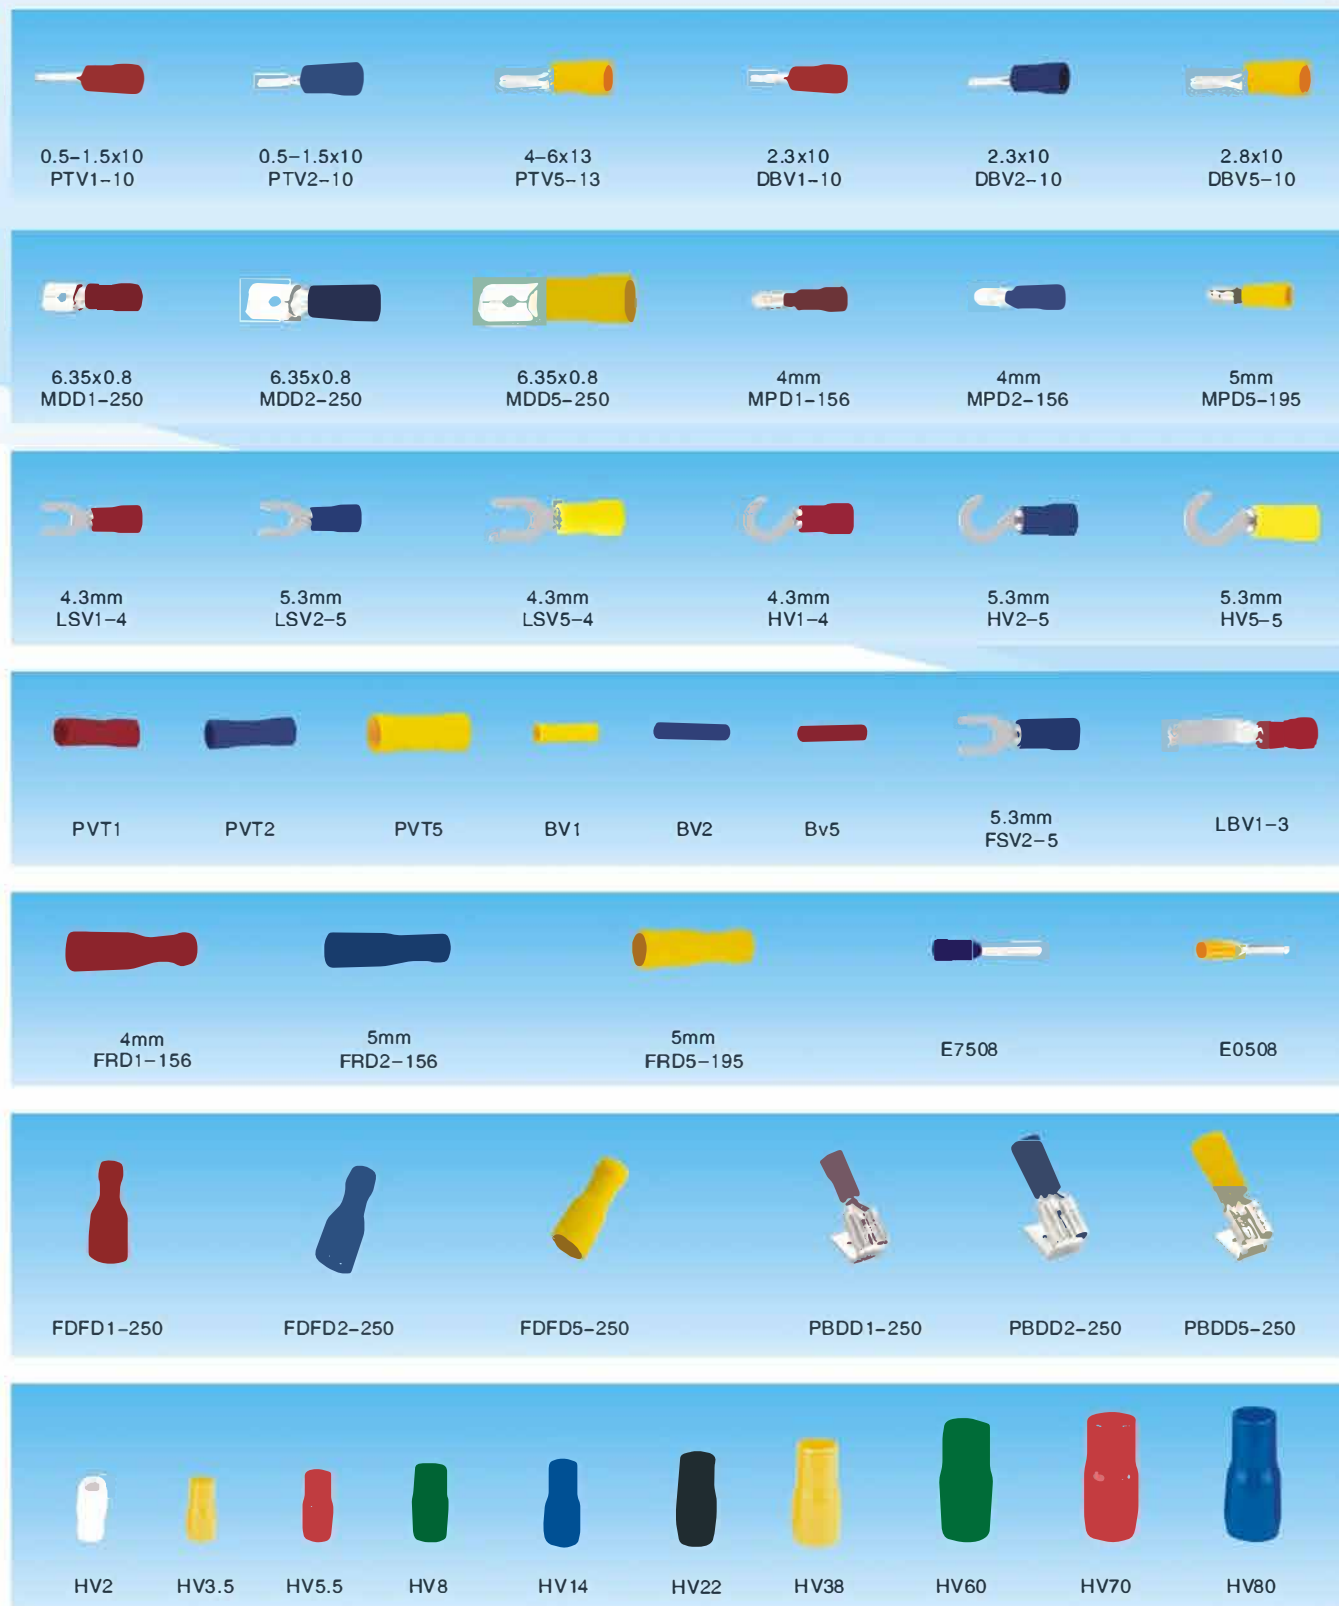

## QSL

### 自锁式尼龙扎带

SELF-LOCKING NYLON CABLE TIES

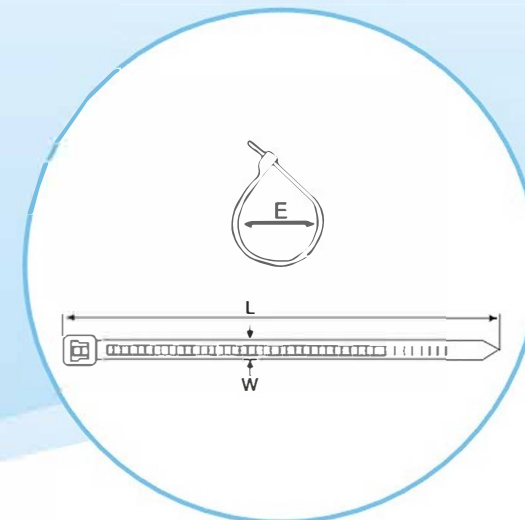

### ◎ 用途 | Application

采用UL认可之尼龙66料制成，防火等级94V-2耐酸、耐蚀、绝缘性良好，不易老化，承受能力强。操作温度在-40℃~85℃，颜色以白以为主，另有抗紫外线之黑色，特殊颜色欢迎订做。

Nylon66,99v-2certificated by UL,Heat-resisting,erosion control,insulatewell and not apt to age. Operating temperature : -40℃-85℃.Natural of white as standard color, uv black and other colors are avaiable as requested.


| 型号 Type     | INCH   | L   | W   | E    | 拉力 |    |
|-------------|--------|-----|-----|------|----|----|
| QLS-3 × 60  | 23/8"  | 60  | 2.5 | 2-11 | 18 | 8  |
| QLS-3 × 80  | 33/16" | 80  | 2.5 | 2-16 | 18 | 8  |
| QLS-3 × 100 | 4"     | 100 | 2.5 | 2-22 | 18 | 8  |
| QLS-3 × 120 | 43/4"  | 120 | 2.5 | 2-30 | 18 | 8  |
| QLS-3 × 150 | 6"     | 150 | 2.5 | 2-35 | 18 | 8  |
| QLS-3 × 200 | 8"     | 200 | 2.5 | 3-50 | 18 | 8  |
| QLS-4 × 120 | 43/4"  | 120 | 3.5 | 3-30 | 40 | 18 |
| QLS-4 × 150 | 6"     | 150 | 3.5 | 3-35 | 40 | 18 |
| QLS-4 × 180 | 7"     | 180 | 3.5 | 3-42 | 40 | 18 |
| QLS-4 × 200 | 8"     | 200 | 3.5 | 3-50 | 40 | 18 |
| QLS-4 × 250 | 10"    | 250 | 3.5 | 3-65 | 40 | 18 |
| QLS-4 × 300 | 115/8" | 300 | 3.5 | 3-80 | 40 | 18 |
| QLS-5 × 150 | 6"     | 150 | 4.8 | 3-35 | 50 | 22 |
| QLS-5 × 200 | 8"     | 200 | 4.8 | 3-50 | 50 | 22 |
| QLS-5 × 250 | 10"    | 250 | 4.8 | 3-65 | 50 | 22 |
| QLS-5 × 300 | 115/8" | 300 | 4.8 | 3-80 | 50 | 22 |
| QLS-5 × 350 | 133/4" | 350 | 4.8 | 3-90 | 50 | 22 |

| 型号 Type      | INCH     | L   | W   | E      | 拉力  |     |
|--------------|----------|-----|-----|--------|-----|-----|
| QLS-5 × 380  | 15"      | 380 | 4.8 | 3-102  | 50  | 22  |
| QLS-5 × 400  | 153/4"   | 400 | 4.8 | 3-105  | 50  | 22  |
| QLS-5 × 450  | 173/4"   | 450 | 4.8 | 3-120  | 50  | 22  |
| QLS-5 × 500  | 1911/16" | 500 | 4.8 | 4-150  | 50  | 22  |
| QLS-8 × 150  | 6"       | 150 | 7.8 | 4-35   | 120 | 55  |
| QLS-8 × 180  | 7"       | 180 | 7.8 | 4-42   | 120 | 55  |
| QLS-8 × 200  | 8"       | 200 | 7.8 | 4-50   | 120 | 55  |
| QLS-8 × 250  | 10"      | 250 | 7.8 | 4-65   | 120 | 55  |
| QLS-8 × 300  | 115/8"   | 300 | 7.8 | 4-80   | 120 | 55  |
| QLS-8 × 350  | 133/4"   | 350 | 7.8 | 4-90   | 120 | 55  |
| QLS-8 × 400  | 153/4"   | 400 | 7.8 | 4-102  | 120 | 55  |
| QLS-8 × 450  | 173/4"   | 450 | 7.8 | 4-118  | 120 | 55  |
| QLS-8 × 500  | 1911/16" | 500 | 7.8 | 4-150  | 120 | 55  |
| QLS-10 × 150 | 173/4"   | 450 | 9   | 8-18   | 175 | 80  |
| QLS-10 × 500 | 1911/16" | 500 | 9   | 8-50   | 175 | 80  |
| QLS-10 × 650 | 259/16"  | 650 | 12  | 15-190 | 250 | 114 |
| QLS-10 × 750 | 291/2"   | 700 | 9   | 15-220 | 250 | 80  |

## QSL

### 绝缘配线槽

WIRING DUCT ( SLOTTED )

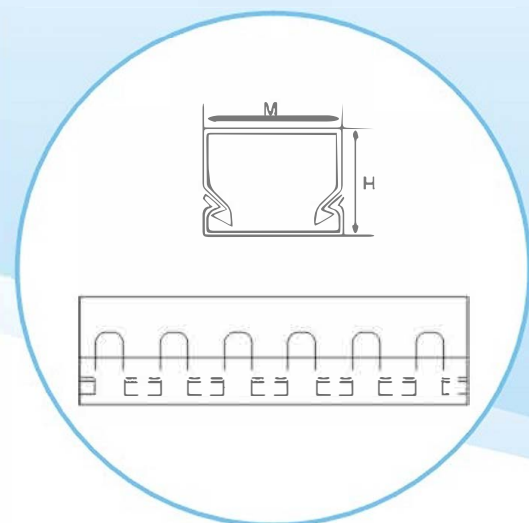

#### ◎ 材质 | Application

材质：采用硬质PVC（灰色）。绝缘性良好，不自然，耐温至85℃。

构造：槽底槽盖两部分组成，底槽两侧设出线孔。

Material: made from PVC(grey), good insulation and heat resisting up to 85℃.


Struction: up of duct bottom and lid, with two out-holes designs at the bottom.

| 型号 Type  | 高 × 宽 H × W | 电线容量<br>CONTAINED WIRE(2.0") | 型号 Type    | 高 × 宽 H × W | 电线容量<br>CONTAINED WIRE(2.0") |
|----------|-------------|------------------------------|------------|-------------|------------------------------|
| PXC-2015 | 20 × 15     | 5-10PCS                      | PXC-5015   | 50 × 15     | 10-25PCS                     |
| PXC-2025 | 20 × 25     | 5-15PCS                      | PXC-5025   | 50 × 25     | 25-45PCS                     |
| PXC-2525 | 25 × 25     | 10-25PCS                     | PXC-5030   | 50 × 30     | 35-50PCS                     |
| PXC-3015 | 30 × 15     | 5-15PCS                      | PXC-5035   | 50 × 35     | 50-60PCS                     |
| PXC-3020 | 30 × 20     | 10-20PCS                     | PXC-5040   | 50 × 40     | 60-70PCS                     |
| PXC-3025 | 30 × 25     | 15-25PCS                     | PXC-5045   | 50 × 45     | 70-80PCS                     |
| PXC-3030 | 30 × 30     | 20-40PCS                     | PXC-5050   | 50 × 50     | 80-90PCS                     |
| PXC-3035 | 30 × 35     | 30-45PCS                     | PXC-5055   | 50 × 55     | 100-110PCS                   |
| PXC-3045 | 30 × 45     | 40-55PCS                     | PXC-5080   | 50 × 80     | 180-200PCS                   |
| PXC-3040 | 30 × 40     | 35-45PCS                     | PXC-50100  | 50 × 100    | 210-260PCS                   |
| PXC-3535 | 35 × 35     | 35-50PCS                     | PXC-8045   | 80 × 45     | 160-180PCS                   |
| PXC-3540 | 35 × 40     | 50-60PCS                     | PXC-8050   | 80 × 50     | 180-200PCS                   |
| PXC-4025 | 40 × 25     | 20-25PCS                     | PXC-8055   | 80 × 55     | 180-210PCS                   |
| PXC-4030 | 30 × 40     | 35-45PCS                     | PXC-8080   | 80 × 80     | 240-290PCS                   |
| PXC-4040 | 40 × 40     | 60-70PCS                     | PXC-80100  | 80 × 100    | 260-350PCS                   |
|          |             |                              | PXC-100100 | 100 × 100   | 300-400PCS                   |

## QSL

### 膨胀管

EXP AND NAILS

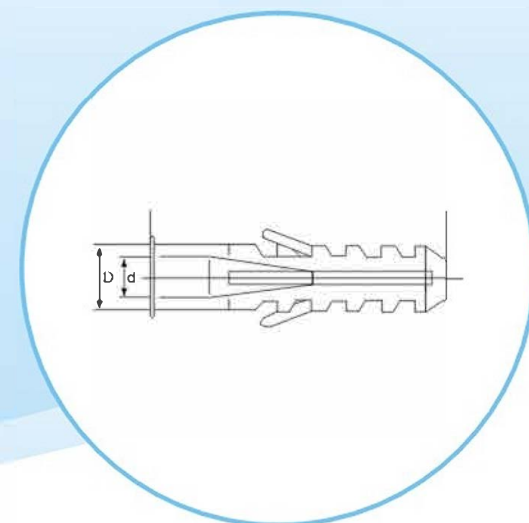

#### ◎ 用途 | Application

采用PE（白色、灰色）料注塑成型，弹性大，耐冲击，绝不破裂。在墙壁钻孔后，直接将管子钉上即可。

Material: PE(white, grey), elasticity and shock resisting, Usage: drill a hole in the wall, nail the tube directly.

| 型号 Type  | L  | D    | d   | 包装 Packing             |
|----------|----|------|-----|------------------------|
| QLEM-05  | 25 | 5    | 3.5 | 1000PCS<br>&<br>100PCS |
| QLEM-06  | 30 | 5.9  | 4.9 |                        |
| QLEM-07  | 30 | 6.8  | 4.9 |                        |
| QLEM-08  | 40 | 7.9  | 5.3 |                        |
| QLEM-09  | 42 | 9    | 5.5 | 500PCS<br>&<br>100PCS  |
| QLEM-10  | 43 | 9.9  | 5.8 |                        |
| QLEM-12  | 57 | 11.8 | 6.3 |                        |
| QLENT-06 | 30 | 5.9  | 4.9 | 1000PCS<br>&<br>100PCS |
| QLENT-08 | 4  | 7.9  | 5.3 |                        |
| QLENT-10 | 43 | 9.9  | 5.8 | 500PCS<br>&<br>100PCS  |
| QLENT-12 | 50 | 11.8 | 6.3 |                        |